



## High Speed Permanent Magnet Levitation Maglev Air Blower Ternary Flow Impeller Direct Coupled Blower

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: Aipu
- Model Number: GF400
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Export Standard Packaging
- Payment Terms: T/T, L/C



### Product Specification

- Typology: Centrifugal Fan
- Flow Range: 148-443m<sup>3</sup>/min
- Boost: 40-150kPa
- Bear: Autonomous Domestic Magnetic Bearings
- Efficiency: 97%
- Highlight: Levitation maglev air blower,  
Permanent Magnet maglev air blower,  
High Speed Magnetic Levitation Blower



for more products please visit us on [aipukqdl.com](http://aipukqdl.com)

## Product Description

# Magnetic Levitation High Speed Permanent Magnet Motor Driven High Efficiency Ternary Flow Impeller Direct Coupled Blower

## Product Description

### System Overview

This advanced blower system combines several cutting-edge technologies to achieve exceptional performance and efficiency:

**Magnetic Levitation Bearings:** The rotor is suspended on an active magnetic bearing system, completely eliminating mechanical contact and the associated friction losses. This allows the rotor to spin at extremely high speeds with minimal power consumption.

**High-Speed Permanent Magnet Motor:** A high-speed permanent magnet (PM) motor provides the driving force for the blower. PM motors offer significantly higher efficiency and power density compared to traditional induction motors.

**Ternary Flow Impeller:** The impeller features a unique three-dimensional blade design that creates a complex, swirling flow pattern. This "ternary flow" geometry optimizes the pressure-flow characteristics, resulting in higher aerodynamic efficiency and reduced losses.

**Direct Coupling:** The PM motor is directly coupled to the impeller, eliminating the need for a gearbox or belt drive. This simplifies the overall system design and improves power transmission efficiency.

### Key Benefits

**High Efficiency:** The combination of magnetic bearings, PM motor, and ternary flow impeller yields an exceptionally efficient blower system, reducing energy consumption.

**Compact & Lightweight:** The direct-coupled, magnetic bearing design allows for a compact, high-power-density package.

**Reliable Operation:** The frictionless magnetic bearings and durable PM motor provide long service life with minimal maintenance.

**High-Speed Capability:** The magnetic levitation enables the rotor to operate at very high rotational speeds, maximizing airflow and pressure performance.

## Performance Features

### Energy saving and high efficiency

High-speed permanent magnet motor and high-efficiency ternary flow impeller are directly coupled.

More than 30% energy-saving than traditional Roots fan.

More than 20% energy-saving than multi-stage centrifugal blower.

More than 10% energy-saving than single-stage high-speed centrifugal blower.

### Low noise

Adopting self-balancing technology, the vibration amount of magnetic levitation bearing is one order of magnitude smaller than that of traditional bearing and no friction. At the same time to take the active damping design, stable operation, body vibration is very small, fan noise at 80dB (A) or so.

### Maintenance-free

Integrated design, skid mounted structure, easy installation, one key start and stop. Daily operation, free of mechanical maintenance, only need to replace the filter.

### Intelligent control

Adopting PLC+GPRS/3G/4G, it can monitor the running status of the fan in real time, and realise the intelligent regulation of wind volume, wind pressure, rotational speed, etc. as well as manual mode control. In case of failure, it can also be remotely repaired and debugged.

## Magnetic Levitation Blower Series Selection

Product Series	GF 50	GF 75	GF100	GF 125	GF 150	GF175	GF 200	GF 250	GF 300	GF350	GF 400
Motor power (KW)	50	75	100	125	150	175	200	250	300	350	400
Boost (kPa)	Inlet flow rate (m³/min) 1atm 20°C										
40	55	86	110	156	168	208	219	270	323	425	443
50	50	74	100	132	149	185	198	247	297	375	396
60	43	64	85	113	127	158	169	210	253	320	356
70	37	55	74	99	111	140	148	184	222	280	312
80	33	49	65	86	97	120	129	160	193	240	271
90	28	44	57	75	84	105	112	139	167	210	235
100		40	52	68	77	96	102	127	153	190	215
110					71	88	95	118	142	175	199
120					66	82	88	110	132	165	185
130									124	152	165
150											148
sizes(mm)	1700×1500×1480		1850×1700×1780			2150×1750×1700			2370×2260×2080		
Weight (kg)	800	1000	1200	1350	1500	1800	2000	2500	2800	3200	3500

When the use conditions of the blower and the above table does not match, the need for performance conversion, our


company can be non-standard design according to user requirements to meet the specific needs of users of various working conditions.

## core technology

### Core Technology with independent intellectual property right-Magnetic Bearing design and control technology

With independent intellectual property rights of 5 degrees of freedom magnetic levitation bearing technology, can ensure that when the equipment is energised, the rotor system can be levitated by electromagnetic force. The controller ensures more than 10,000 times of signal acquisition per second and gives real-time correction signals synchronously to ensure the stable levitation of the high-speed rotor.

With redundant power supply system and protection bearings to achieve multiple protection, will not cause any damage due to sudden power failure or fault shutdown.

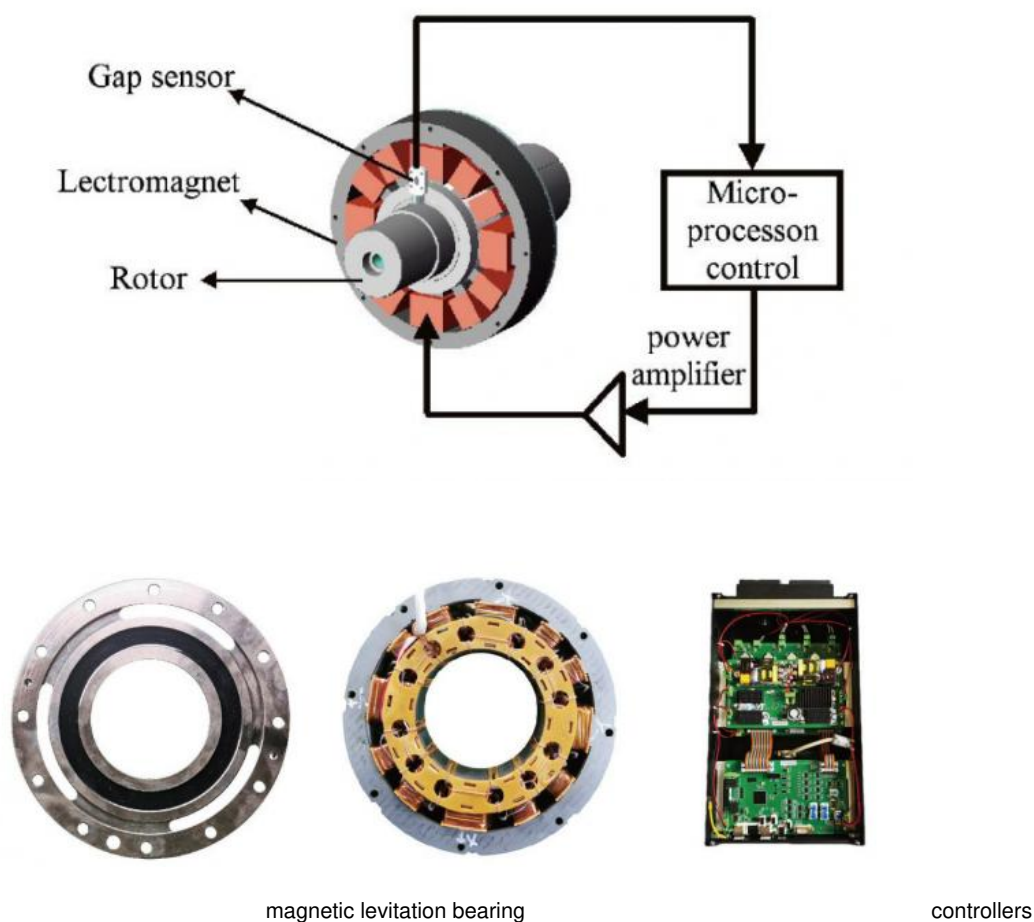

Yixing Aipu Air System Equipment Co., Ltd



13771572002



183426306@qq.com



aipukqdl.com

Yixing Yicheng Street Hardware Electromechanical City, Phase I, Block 5, District 3, 8071