




Magnetic Levitation Permanent Magnet Drive 3D Optimised Flow Impeller Blower

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Aipu
- Model Number: GF350
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Export Standard Packaging
- Payment Terms: T/T, L/C

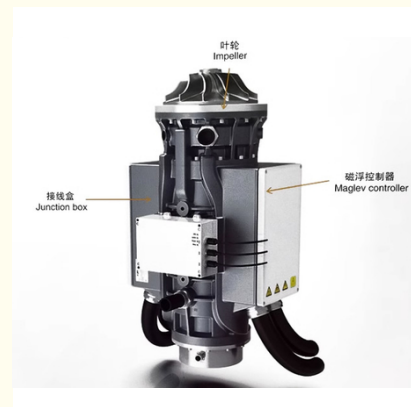

Product Specification

- Typology: Centrifugal Fan
- Flow Range: 152-425m³/min
- Boost: 40-130kPa
- Bear: Autonomous Domestic Magnetic Bearings
- Efficiency: 97%
- Highlight: **Magnetic Levitation Impeller Blower ,
3D Flow Impeller Blower ,
Optimised Flow Impeller Blower**



for more products please visit us on aipukqdl.com

Product Description

Magnetic Levitation High Efficiency Permanent Magnet Drive 3D Optimised Flow Impeller Blower

Product Description

The Maglev High Efficiency Permanent Magnet Drive 3D Optimised Flow Impeller Blower incorporates a number of cutting-edge technologies to achieve outstanding performance and efficiency.

Key Technical Features

Magnetic Levitation Bearings

Electromagnetic levitation technology completely eliminates mechanical contact and friction.

Dramatically improves system reliability and service life

Allows high speed rotation, optimising airflow performance

High-efficiency permanent magnet motor drive

Adopts high efficiency permanent magnet motor as drive system

Higher efficiency and power density than traditional induction motors

Fast dynamic response characteristics

Three-dimensional optimised flow impeller

The impeller adopts three-dimensional optimised flow design.

Creates complex vortex airflow patterns and improves aerodynamic efficiency.

Reduces flow losses and noise and vibration

Direct coupled design

The motor is directly coupled to the impeller without the need for a gearbox or belt drive.

Simplifies the overall structure and improves transmission efficiency

Product Advantages

Ultra-high efficiency: the perfect combination of magnetic levitation, high-efficiency motors and optimised impellers significantly reduces energy consumption.

Compact and lightweight: direct-connected design for smaller and lighter overall dimensions.

High reliability: Virtually maintenance-free due to contactless maglev and permanent magnet motor construction.

High speed performance: Maglev technology supports higher speeds and optimised airflow output.

Performance Features

Energy saving and high efficiency

High-speed permanent magnet motor and high-efficiency ternary flow impeller are directly coupled.

More than 30% energy-saving than traditional Roots fan.

More than 20% energy-saving than multi-stage centrifugal blower.

More than 10% energy-saving than single-stage high-speed centrifugal blower.

Low noise

Adopting self-balancing technology, the vibration amount of magnetic levitation bearing is one order of magnitude smaller than that of traditional bearing and no friction. At the same time to take the active damping design, stable operation, body vibration is very small, fan noise at 80dB (A) or so.

Maintenance-free

Integrated design, skid mounted structure, easy installation, one key start and stop. Daily operation, free of mechanical maintenance, only need to replace the filter.

Intelligent control

Adopting PLC+GPRS/3G/4G, it can monitor the running status of the fan in real time, and realise the intelligent regulation of wind volume, wind pressure, rotational speed, etc. as well as manual mode control. In case of failure, it can also be remotely repaired and debugged.

Magnetic Levitation Blower Series Selection

Product Series	GF 50	GF 75	GF 100	GF125	GF 150	GF175	GF 200	GF 250	GF 300	GF350	GF 400
Motor power (KW)	50	75	100	125	150	175	200	250	300	350	400
Boost (kPa)	Inlet flow rate (m³/min) 1 atm 20°C										
40	55	86	110	156	168	208	219	270	323	425	443
50	50	74	100	132	149	185	198	247	297	375	396
60	43	64	85	113	127	158	169	210	253	320	356
70	37	55	74	99	111	140	148	184	222	280	312
80	33	49	65	86	97	120	129	160	193	240	271

90	28	44	57	75	84	105	112	139	167	210	235
100		40	52	68	77	96	102	127	153	190	215
110					71	88	95	118	142	175	199
120					66	82	88	110	132	165	185
130									124	152	165
150											148
sizes(mm)	1700×1500×1480		1850×1700×1780			2150×1750×1700			2370×2260×2080		
Weight (kg)	800	1000	1200	1350	1500	1800	2000	2500	2800	3200	3500


When the use conditions of the blower and the above table does not match, the need for performance conversion, our company can be non-standard design according to user requirements to meet the specific needs of users of various working conditions.

core technology

Core Technology with independent intellectual property right-Magnetic Bearing design and control technology

With independent intellectual property rights of 5 degrees of freedom magnetic levitation bearing technology, can ensure that when the equipment is energised, the rotor system can be levitated by electromagnetic force. The controller ensures more than 10,000 times of signal acquisition per second and gives real-time correction signals synchronously to ensure the stable levitation of the high-speed rotor.

With redundant power supply system and protection bearings to achieve multiple protection, will not cause any damage due to sudden power failure or fault shutdown.

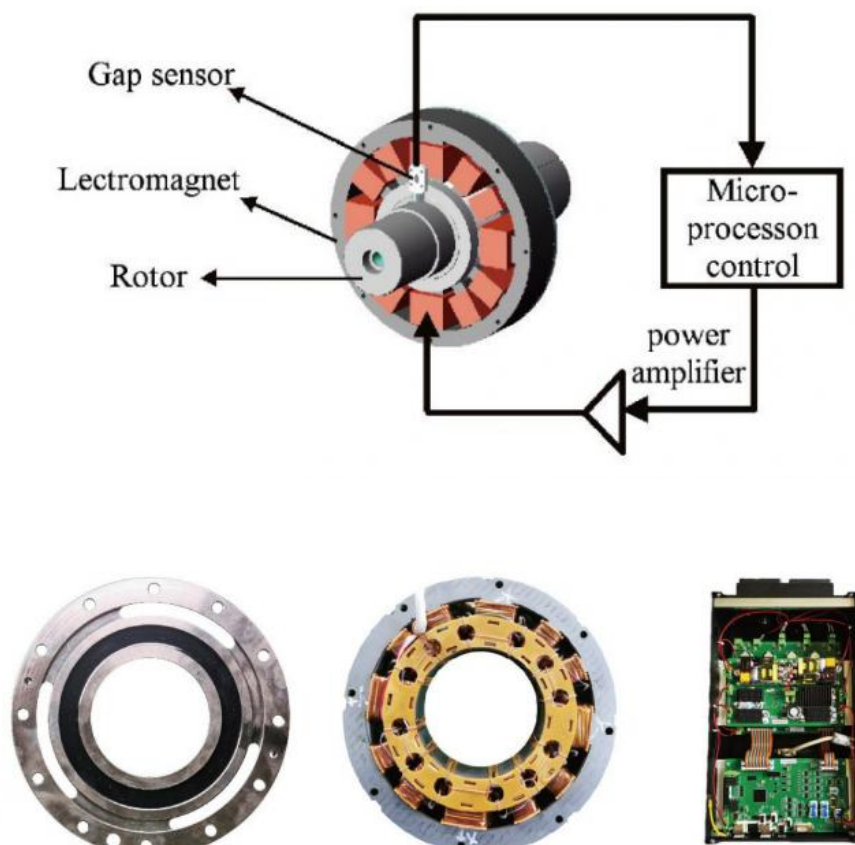

magnetic levitation bearing

controllers



Yixing Aipu Air System Equipment Co., Ltd



13771572002



183426306@qq.com



aipukqdl.com

