



Special Materials And Surface Treatment Centrifugal Multistage Blowers 19.6-137.2kPa Boost

Basic Information

- Place of Origin: China
- Brand Name: Aipu
- Model Number: Level MC
- Minimum Order Quantity: 1
- Price: Negotiable
- Packaging Details: Export Standard Packaging
- Payment Terms: T/T, L/C



Product Specification

- Flow Range: 20-1500m³/min
- Shell Material: HT250
- Boost: 19.6-137.2kPa
- Specification: MC
- Place Of Origin: China
- Highlight: 137.2kpa centrifugal multistage blowers,
137.2kpa multistage centrifugal air blower,
1500m³/min centrifugal multistage blowers



Product Description

Special materials and surface treatment for multi-stage centrifugal blowers

Product Description

Anti corrosion multi-stage centrifugal blower - special materials and surface treatment for harsh environments

Corrosion-Resistant Construction:

Special materials, including stainless steel and engineering plastics

Protective surface treatments to withstand chemical exposure and moisture

Harsh Environment Suitability:

Designed to operate reliably in acidic, alkaline, or saline conditions

Able to handle exposure to aggressive chemicals, gases, and liquids

Enhanced Durability and Lifespan:

Reinforced structural components and wear-resistant coatings

Minimized maintenance requirements and extended service life

High-Performance Airflow:

Optimized multi-stage centrifugal design for efficient air movement

Provide powerful airflow in demanding industrial applications

Customizable Configurations:

Available in various sizes and flow capacities

Tailored to meet specific ventilation requirements in diverse industries

These multi-stage centrifugal blowers are designed to provide reliable and long-lasting performance in harsh corrosive environments. These blowers are made of special materials, advanced surface treatments, and sturdy structural designs that can withstand exposure to corrosive chemicals, gases, and liquids without affecting their functionality.

These blowers are suitable for various industries, including chemical processing, mining, waste management, and marine applications, and are designed to operate efficiently and safely under the most challenging conditions. The corrosion-resistant structure ensures minimum maintenance requirements and longer service life, providing an economical and efficient solution for your industrial needs.

Product Features

The shell of inlet and outlet, and return channel of blower are fully adapt to impeller, The streamline design reduces loss

The impeller is designed by three-dimensional meridian plane and compound curve technology, enjoys high efficiency.

The impeller intake seal-inducer improves inlet fluidity of impeller.

The airfoil return-flow blade can reduces loss ,gets high static pressure.

The blower performance was optimized with fluid analysis technology, The polytropic efficiency is up to 78%

Some blowers use Three-dimensional impeller, which have high efficiency and good performance.

After strict dynamic balance, the rotor has low vibration, high reliability and low overall noise.

The structure of blower is advanced and reasonable .Easy-worn parts are few, installation, operation and maintenance are convenient.


Stator

The stator is vertical split type structure, which is consists of the inlet chamber, intermediate casing and discharge scroll case, these parts make up of the gas channels with bolts. The inlet chamber, intermediate casing and discharge scroll case are founded using high quality cast iron and rosin model, having small distortion after strict anneal dispose. Stator with high precision and high coaxial can insure stable operation of rotor assembly



Rotor

Rotor is consists of impellers, main shaft, shaft sleeve, half coupling and soon. The main shaft makes use of the high quality carbon-steel, and carries through quenching and tempering. After assembly, the rotor was dynamically balanced to ensure steady and reliable running.

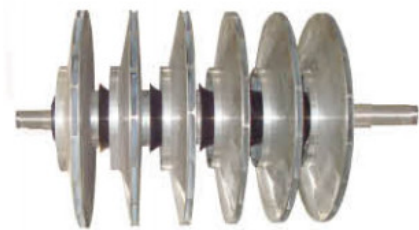

Scope of application

It is suitable for sewage treatment industry, petrochemical industry, food and drug industry, textile industry, metallurgy industry, cement and construction materials industry, printing and dyeing industry and other industries.

specification

MC 系列铸造多级离心鼓风机性能参数 (50Hz)

Performance Parameters of Series MC Casting Multistage Centrifugal Blower (50Hz)

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC20-1.2	20	101.32	20	1.2	2980	19.6	9.1	Y160M-2	11	125	700	150	150
MC20-1.25	20	101.32	20	1.2	2980	24.5	10.7	Y160L-2	18.5	150	810		
MC20-1.3	20	101.32	20	1.2	2980	29.4	12.3	Y160L-2	18.5	150	920		
MC20-1.35	20	101.32	20	1.2	2980	34.3	14.2	Y160L-2	18.5	150	1030		
MC20-1.4	20	101.32	20	1.2	2980	39.2	16.3	Y180M-2	22	180	1140		
MC20-1.45	20	101.32	20	1.2	2980	44.1	18.1	Y180M-2	22	180	1140		
MC20-1.5	20	101.32	20	1.2	2980	49.0	20.0	Y200L ₁ -2	30	240	1250		
MC20-1.55	20	101.32	20	1.2	2980	53.9	21.8	Y200L ₁ -2	30	240	1360		
MC20-1.6	20	101.32	20	1.2	2980	58.8	23.6	Y200L ₁ -2	30	240	1470		
MC25-1.2	25	101.32	20	1.2	2980	19.6	11.0	Y160L-2	15	135	700		
MC25-1.25	25	101.32	20	1.2	2980	24.5	14	Y160L-2	18.5	135	810		
MC25-1.3	25	101.32	20	1.2	2980	29.4	16.8	Y180M-2	22	180	920		
MC25-1.35	25	101.32	20	1.2	2980	34.3	19.2	Y200L ₁ -2	30	240	1030		
MC25-1.4	25	101.32	20	1.2	2980	39.2	20.9	Y200L ₁ -2	30	240	1030		
MC25-1.45	25	101.32	20	1.2	2980	44.1	24.3	Y200L ₁ -2	30	240	1140		
MC25-1.5	25	101.32	20	1.2	2980	49.0	26.7	Y200L ₂ -2	37	255	1250		
MC25-1.55	25	101.32	20	1.2	2980	53.9	28.1	Y200L ₂ -2	37	255	1360		
MC25-1.6	25	101.32	20	1.2	2980	58.8	29.6	Y200L ₂ -2	37	255	1470		
MC30-1.2	30	101.32	20	1.2	2980	19.6	13.2 3.13	Y160L-2	18.5	150	700		
MC30-1.25	30	101.32	20	1.2	2980	24.5	16.1	Y180M-2	22	180	810		
MC30-1.3	30	101.32	20	1.2	2980	29.4	19.7	Y200L ₁ -2	30	240	920		
MC30-1.35	30	101.32	20	1.2	2980	34.3	23.1	Y200L ₁ -2	30	240	1030		
MC30-1.4	30	101.32	20	1.2	2980	39.2	26.1	Y200L ₂ -2	37	255	1140		
MC30-1.45	30	101.32	20	1.2	2980	44.1	29.2	Y200L ₂ -2	37	255	1250		
MC30-1.5	30	101.32	20	1.2	2980	49.0	32.2	Y225M-2	45	309	1360		
MC30-1.55	30	101.32	20	1.2	2980	53.9	35.1	Y225M-2	45	309	1470		
MC30-1.6	30	101.32	20	1.2	2980	58.8	40.1	Y250M-2	55	403	1470		
MC35-1.2	35	101.32	20	1.2	2980	19.6	16.1	Y180M-2	22	180	700		
MC35-1.25	35	101.32	20	1.2	2980	24.5	18	Y180M-2	22	180	810		
MC35-1.3	35	101.32	20	1.2	2980	29.4	23.7	Y200L ₁ -2	30	240	920		
MC35-1.35	35	101.32	20	1.2	2980	34.3	27.1	Y200L ₂ -2	37	255	1030		
MC35-1.4	35	101.32	20	1.2	2980	39.2	30.2	Y200L ₂ -2	37	255	1140		
MC35-1.45	35	101.32	20	1.2	2980	44.1	33.5	Y200L ₂ -2	37	255	1250		
MC35-1.5	35	101.32	20	1.2	2980	49.0	37.8	Y225M-2	45	309	1360		
MC35-1.55	35	101.32	20	1.2	2980	53.9	41.1	Y250M-2	55	403	1470		
MC35-1.6	35	101.32	20	1.2	2980	58.8	44.2	Y250M-2	55	403	1470		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC40-1.2	40	101.32	20	1.2	2980	19.6	18.1	Y180M-2	22	180	1000	200	200
MC40-1.3	40	101.32	20	1.2	2980	29.2	27.0	Y200L₂-2	37	255	1180		
MC40-1.35	40	101.32	20	1.2	2980	34.3	29.2	Y200L₂-2	37	255	1360		
MC40-1.4	40	101.32	20	1.2	2980	39.2	35.2	Y225M-2	45	309	1540		
MC40-1.45	40	101.32	20	1.2	2980	44.1	39.3	Y225M-2	45	309	1720		
MC40-1.5	40	101.32	20	1.2	2980	49	43.1	Y250M-2	55	403	1720		
MC40-1.55	40	101.32	20	1.2	2980	53.9	47.2	Y250M-2	55	403	1900		
MC40-1.6	40	101.32	20	1.2	2980	58.8	51.2	Y280S-2	75	544	1900		
MC40-1.65	40	101.32	20	1.2	2980	63.7	56.0	Y280S-2	75	544	2080		
MC40-1.7	40	101.32	20	1.2	2980	68.6	60.1	Y280S-2	75	544	2260		
MC40-1.75	40	101.32	20	1.2	2980	73.5	61.8	Y280S-2	75	544	2260		
MC45-1.2	45	101.32	20	1.2	2980	19.6	21.1	Y200L1-2	30	240	1180		
MC45-1.3	45	101.32	20	1.2	2980	29.4	30.2	Y200L₂-2	37	255	1360		
MC45-1.35	45	101.32	20	1.2	2980	34.3	35.1	Y225M-2	45	309	1540		
MC45-1.4	45	101.32	20	1.2	2980	39.2	39.5	Y250M-2	55	403	1540		
MC45-1.45	45	101.32	20	1.2	2980	44.1	44.2	Y250M-2	55	403	1720		
MC45-1.5	45	101.32	20	1.2	2980	49.0	48.6	Y250M-2	55	403	1900		
MC45-1.55	45	101.32	20	1.2	2980	53.9	52.6	Y280S-2	75	544	1900		
MC45-1.6	45	101.32	20	1.2	2980	58.8	57.1	Y280S-2	75	544	2080		
MC45-1.65	45	101.32	20	1.2	2980	63.7	61.2	Y280S-2	75	544	2260		
MC45-1.7	45	101.32	20	1.2	2980	68.6	65.3	Y280S-2	75	544	2260		
MC45-1.75	45	101.32	20	1.2	2980	73.5	69.1	Y280M-2	90	620	2260		
MC50-1.2	50	101.32	20	1.2	2980	19.6	23.1	Y200L1-2	30	240	1180		
MC50-1.3	50	101.32	20	1.2	2980	29.4	33.8	Y225M-2	45	255	1360		
MC50-1.35	50	101.32	20	1.2	2980	34.3	38.9	Y225M-2	45	309	1540		
MC50-1.4	50	101.32	20	1.2	2980	39.2	44.2	Y250M-2	55	403	1540		
MC50-1.45	50	101.32	20	1.2	2980	44.1	48.7	Y250M-2	55	403	1720		
MC50-1.5	50	101.32	20	1.2	2980	49.0	54.5	Y280S-2	75	544	1900		
MC50-1.55	50	101.32	20	1.2	2980	53.9	60.6	Y280S-2	75	544	1900		
MC50-1.6	50	101.32	20	1.2	2980	58.8	65.2	Y280S-2	75	544	2080		
MC50-1.65	50	101.32	20	1.2	2980	63.7	69.1	Y280M-2	90	620	2260		
MC50-1.7	50	101.32	20	1.2	2980	68.6	74.4	Y280M-2	90	620	2260		
MC50-1.75	50	101.32	20	1.2	2980	73.5	76.7	Y315S-2	110	980	2260		
MC55-1.2	55	101.32	20	1.2	2980	19.6	25.3	Y200L1-2	30	240	1180		
MC55-1.3	55	101.32	20	1.2	2980	29.4	37.2	Y225M-2	45	309	1360		
MC55-1.35	55	101.32	20	1.2	2980	34.3	43.1	Y250M-2	55	403	1540		
MC55-1.4	55	101.32	20	1.2	2980	39.2	48.7	Y250M-2	55	403	1540		
MC55-1.45	55	101.32	20	1.2	2980	44.1	54.2	Y280S-2	75	544	1720		
MC55-1.5	55	101.32	20	1.2	2980	49.0	59.3	Y280S-2	75	544	1900		
MC55-1.55	55	101.32	20	1.2	2980	53.9	64.7	Y280S-2	75	544	1900		
MC55-1.6	55	101.32	20	1.2	2980	58.8	69.5	Y280M-2	90	620	2080		
MC55-1.65	55	101.32	20	1.2	2980	63.7	74.6	Y280M-2	90	620	2260		
MC55-1.7	55	101.32	20	1.2	2980	68.6	80.2	Y315S-2	110	980	2260		
MC55-1.75	55	101.32	20	1.2	2980	73.5	91.5	Y315S-2	110	980	2260		
MC60-1.2	60	101.32	20	1.2	2980	19.6	28.1	Y200L₂-2	37	255	1650		
MC60-1.3	60	101.32	20	1.2	2980	29.4	41.2	Y225M-2	45	309	1810		
MC60-1.35	55	101.32	20	1.2	2980	34.3	47.1	Y250M-2	55	403	1970		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC60-1.4	60	101.32	20	1.2	2980	39.2	52.8	Y280S-2	75	544	2130	200	200
MC60-1.45	55	101.32	20	1.2	2980	44.1	59.3	Y280S-2	75	544	2180		
MC60-1.5	60	101.32	20	1.2	2980	49.0	65.1	Y280S-2	75	544	2290		
MC60-1.55	60	101.32	20	1.2	2980	53.9	71.2	Y280M-2	90	620	2450		
MC60-1.6	60	101.32	20	1.2	2980	58.8	77.6	Y280M-2	90	620	2610		
MC60-1.65	60	101.32	20	1.2	2980	63.7	83.3	Y315S-2	110	980	2770		
MC60-1.7	60	101.32	20	1.2	2980	68.6	88.1	Y315S-2	110	980	2820		
MC60-1.75	60	101.32	20	1.2	2980	73.5	99.5	Y315M ₁ -2	132	1080	2260	250	250
MC65-1.2	65	101.32	20	1.2	2980	19.6	30.8	Y200L ₁ -2	37	255	2000		
MC65-1.3	65	101.32	20	1.2	2980	29.4	44.5	Y250M-2	55	403	2350		
MC65-1.4	65	101.32	20	1.2	2980	39.2	58.0	Y280S-2	75	544	2700		
MC65-1.5	65	101.32	20	1.2	2980	49.0	70.8	Y280M-2	90	620	3060		
MC65-1.55	65	101.32	20	1.2	2980	53.9	77.7	Y280M-2	90	620	3060		
MC65-1.6	65	101.32	20	1.2	2980	58.8	83.2	Y315S-2	110	980	3410		
MC65-1.65	65	101.32	20	1.2	2980	63.7	89.3	Y315S-2	110	980	3450		
MC65-1.7	65	101.32	20	1.2	2980	68.6	95.2	Y315M ₁ -2	110	376	3760		
MC65-1.75	65	101.32	20	1.2	2980	73.5	101.4	Y315M ₁ -2	132	1080	3790		
MC65-1.8	65	101.32	20	1.2	2980	73.5	107.0	Y315M ₁ -2	132	1080	3820		
MC65-1.9	65	101.32	20	1.2	2980	78.4	117.9	Y315M ₁ -2	132	1080	4110		
MC70-1.2	70	101.32	20	1.2	2980	19.6	33.1	Y225M-2	45	309	2000		
MC70-1.3	70	101.32	20	1.2	2980	29.4	48.0	Y250M-2	55	403	2350		
MC70-1.4	70	101.32	20	1.2	2980	39.2	62.5	Y280S-2	75	544	2700		
MC70-1.5	70	101.32	20	1.2	2980	49.0	76.4	Y280M-2	90	620	3060		
MC70-1.55	70	101.32	20	1.2	2980	53.9	83.8	Y280M-2	90	620	3060		
MC70-1.6	70	101.32	20	1.2	2980	58.8	89.7	Y315S-2	110	980	3410		
MC70-1.65	70	101.32	20	1.2	2980	63.7	96.1	Y315S-2	110	980	3450		
MC70-1.7	70	101.32	20	1.2	2980	68.6	102.5	Y315M ₁ -2	132	1080	3760		
MC70-1.75	70	101.32	20	1.2	2980	73.5	108.7	Y315M ₁ -2	132	1080	3790		
MC70-1.8	70	101.32	20	1.2	2980	78.4	114.8	Y315M ₁ -2	132	1080	3820		
MC70-1.9	70	101.32	20	1.2	2980	88.2	127.0	Y315L ₁ -2	160	1160	4110		
MC75-1.2	75	101.32	20	1.2	2980	19.6	35.4	Y225M-2	45	309	2000		
MC75-1.3	75	101.32	20	1.2	2980	29.4	51.4	Y280S-2	75	544	2350		
MC75-1.4	75	101.32	20	1.2	2980	39.2	67.0	Y280M-2	90	620	2700		
MC75-1.5	75	101.32	20	1.2	2980	49.0	82.0	Y315S-2	110	980	3060		
MC75-1.55	75	101.32	20	1.2	2980	53.9	89.0	Y315S-2	110	980	3060		
MC75-1.6	75	101.32	20	1.2	2980	58.8	96.3	Y315S-2	110	980	3410		
MC75-1.65	75	101.32	20	1.2	2980	63.7	103.2	Y315M ₁ -2	132	1080	3450		
MC75-1.7	75	101.32	20	1.2	2980	68.6	110.0	Y315M ₁ -2	132	1080	3760		
MC75-1.75	75	101.32	20	1.2	2980	73.5	116.7	Y315M ₁ -2	132	1080	3790		
MC75-1.8	75	101.32	20	1.2	2980	78.4	123.0	Y315L ₁ -2	160	1160	3820		
MC75-1.9	75	101.32	20	1.2	2980	88.2	136.0	Y315L ₁ -2	160	1160	4110		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tem- pe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC80-1.3	80	101.32	20	1.2	2980	29.4	54.5	Y280S-2	75	544	1870	250	250
MC80-1.4	80	101.32	20	1.2	2980	39.2	71.2	Y280M-2	90	620	2170		
MC80-1.5	80	101.32	20	1.2	2980	49.0	87	Y315S-2	110	980	2470		
MC80-1.55	80	101.32	20	1.2	2980	53.9	95	Y315M ₁ -2	110	980	2470		
MC80-1.6	80	101.32	20	1.2	2980	58.8	102.1	Y315M ₁ -2	132	1080	2770		
MC80-1.65	80	101.32	20	1.2	2980	63.7	109.3	Y315M ₁ -2	132	1080	3070		
MC80-1.7	80	101.32	20	1.2	2980	68.6	111.2	Y315M ₁ -2	132	1080	3370		
MC90-1.3	90	101.32	20	1.2	2980	29.4	61.3	Y280S-2	75	544	1870	300	300
MC90-1.4	90	101.32	20	1.2	2980	39.2	80.1	Y280M-2	90	620	2170		
MC90-1.5	90	101.32	20	1.2	2980	49.0	98.0	Y315M ₁ -2	132	1080	2470		
MC90-1.55	90	101.32	20	1.2	2980	53.9	106.3	Y315M ₁ -2	132	1080	2470		
MC90-1.6	90	101.32	20	1.2	2980	58.8	115.0	Y315L ₁ -2	160	1160	2770		
MC90-1.65	90	101.32	20	1.2	2980	63.7	123.7	Y315L ₁ -2	160	1160	3070		
MC90-1.7	90	101.32	20	1.2	2980	68.6	131.7	Y315L ₁ -2	160	1160	3370		
MC100-1.3	100	101.32	20	1.2	2980	29.4	68.3	Y280M-2	90	620	1870		
MC100-1.4	100	101.32	20	1.2	2980	39.2	89.1	Y315S-2	110	980	2170		
MC100-1.5	100	101.32	20	1.2	2980	49.0	108.8	Y315M ₁ -2	132	1080	2470		
MC100-1.55	100	101.32	20	1.2	2980	53.9	118.2	Y315L ₁ -2	160	1160	2470		
MC100-1.6	100	101.32	20	1.2	2980	58.8	128.0	Y315L ₁ -2	160	1160	2770		
MC100-1.65	100	101.32	20	1.2	2980	63.7	136.8	Y315L ₁ -2	160	1160	3070		
MC100-1.7	100	101.32	20	1.2	2980	68.6	146.0	Y315L ₂ -2	185	1220	3070		
MC110-1.3	110	101.32	20	1.2	2980	29.4	75.1	Y280M-2	90	620	1870		
MC110-1.4	110	101.32	20	1.2	2980	39.2	95.1	Y315M ₁ -2	110	1080	2170		
MC110-1.5	110	101.32	20	1.2	2980	49.0	117.6	Y315L ₁ -2	160	1160	2470		
MC110-1.55	110	101.32	20	1.2	2980	53.9	128.1	Y315L ₁ -2	160	1160	2470		
MC110-1.6	110	101.32	20	1.2	2980	58.8	138.2	Y315L ₁ -2	160	1160	2770		
MC110-1.65	110	101.32	20	1.2	2980	63.7	150.8	Y315L ₂ -2	185	1220	3070		
MC110-1.7	110	101.32	20	1.2	2980	68.6	160.5	Y315L ₂ -2	200	1220	3370		
MC120-1.3	120	101.32	20	1.2	2980	29.4	75.0	Y280M-2	90	620	1870		
MC120-1.4	120	101.32	20	1.2	2980	39.2	102.2	Y315M ₁ -2	132	1080	2170		
MC120-1.5	120	101.32	20	1.2	2980	49.0	119.0	Y315L ₁ -2	160	1160	2470		
MC120-1.55	120	101.32	20	1.2	2980	53.9	128.1	Y315L ₁ -2	160	1160	2470		
MC120-1.6	120	101.32	20	1.2	2980	58.8	139.7	Y315L ₂ -2	185	1220	2770		
MC120-1.65	120	101.32	20	1.2	2980	63.7	149.2	Y315L ₂ -2	185	1220	3070		
MC120-1.7	120	101.32	20	1.2	2980	68.6	166.8	Y315L ₂ -2	200	1220	3370		
MC130-1.3	130	101.32	20	1.2	2980	29.4	81.1	Y315S-2	110	980	1870		
MC130-1.4	130	101.32	20	1.2	2980	39.2	105.5	Y315M-2	132	1080	2170		
MC130-1.5	130	101.32	20	1.2	2980	49.0	117.2	Y315L ₁ -2	160	1160	2170		
MC130-1.55	130	101.32	20	1.2	2980	53.9	128.8	Y315L ₁ -2	160	1160	2470		
MC130-1.6	130	101.32	20	1.2	2980	58.8	140.1	Y315L ₂ -2	185	1220	2770		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC130-1.65	130	101.32	20	1.2	2980	63.7	158.2	Y315L₂-2	200	1220	3070	400	350
MC130-1.7	130	101.32	20	1.2	2980	68.6	170.0	Y315L₂-2	200	1220	3370		
MC140-1.3	140	101.32	20	1.2	2980	29.4	87.3	Y315S1-2	110	980	2800		
MC140-1.35	140	101.32	20	1.2	2980	34.3	100.8	Y315M1-2	132	1080	3300		
MC140-1.4	140	101.32	20	1.2	2980	39.2	114.0	Y315L1-2	160	1160	3800		
MC140-1.45	140	101.32	20	1.2	2980	44.0	126.2	Y315L1-2	160	1160	3800		
MC140-1.5	140	101.32	20	1.2	2980	49.0	145.1	Y315L2-2	185	1220	4300		
MC140-1.55	140	101.32	20	1.2	2980	53.9	151.2	Y315L2-2	185	1220	4300		
MC140-1.6	140	101.32	20	1.2	2980	58.8	163.1	Y315L2-2	200	1220	4800		
MC140-1.65	140	101.32	20	1.2	2980	63.7	174.8	Y355M1-2	220	1650	5300		
MC140-1.7	140	101.32	20	1.2	2980	68.6	186.1	Y355M2-2	220	1650	5300		
MC140-1.75	140	101.32	20	1.2	2980	73.5	197.3	Y355M-2	250	1760	5800		
MC140-1.8	140	101.32	20	1.2	2980	78.4	208.6	Y355M-2	250	1760	5800		
MC150-1.3	150	101.32	20	1.2	2980	29.4	93.8	Y315S1-2	110	980	2800		
MC150-1.35	150	101.32	20	1.2	2980	34.3	108.1	Y315M1-2	132	1080	3300		
MC150-1.4	150	101.32	20	1.2	2980	39.2	121.8	Y315L1-2	160	1160	3800		
MC150-1.45	150	101.32	20	1.2	2980	44.0	135.8	Y315L1-2	160	1160	3800		
MC150-1.5	150	101.32	20	1.2	2980	49.0	142.1	Y315L2-2	185	1220	4300		
MC150-1.55	150	101.32	20	1.2	2980	53.9	162.1	Y315L2-2	200	1220	4300		
MC150-1.6	150	101.32	20	1.2	2980	58.8	174.8	Y355M-2	220	1650	4800		
MC150-1.65	150	101.32	20	1.2	2980	63.7	187.2	Y355M1-2	220	1650	5300		
MC150-1.7	150	101.32	20	1.2	2980	68.6	199.3	Y355M2-2	250	1760	5300		
MC150-1.75	150	101.32	20	1.2	2980	73.5	211.7	Y355L1-2	280	1830	5800		
MC150-1.8	150	101.32	20	1.2	2980	78.4	223.4	Y355L1-2	280	1830	5800		
MC160-1.3	160	101.32	20	1.2	2980	29.4	100.1	Y315M1-2	132	1080	2800		
MC160-1.35	160	101.32	20	1.2	2980	34.3	115.2	Y315L1-2	160	1160	3300		
MC160-1.4	160	101.32	20	1.2	2980	39.2	130.1	Y315L₁-2	160	1160	3800		
MC160-1.45	160	101.32	20	1.2	2980	44.1	144.7	Y315L₂-2	185	1220	3800		
MC160-1.5	160	101.32	20	1.2	2980	49.0	158.8	Y315L₂-2	200	1220	4300		
MC160-1.55	160	101.32	20	1.2	2980	53.9	172.7	Y355M₁-2	220	1650	4300		
MC160-1.6	160	101.32	20	1.2	2980	58.8	186.4	Y355M₁-2	220	1650	4800		
MC160-1.65	160	101.32	20	1.2	2980	63.7	199.7	Y355M-2	250	1760	5300		
MC160-1.7	160	101.32	20	1.2	2980	68.6	212.9	Y355L₁-2	280	1830	5300		
MC160-1.75	160	101.32	20	1.2	2980	73.5	225.8	Y355L₁-2	280	1830	5800		
MC160-1.8	160	101.32	20	1.2	2980	78.4	238.2	Y355L₂-2	315	1900	5800		
MC180-1.3	180	101.32	20	1.2	2980	29.4	112.0	Y315L₁-2	160	1160	2800		
MC180-1.35	180	101.32	20	1.2	2980	34.3	129.1	Y315L₁-2	160	1160	3300		
MC180-1.4	180	101.32	20	1.2	2980	39.2	146.2	Y315L₂-2	185	1220	3800		
MC180-1.45	180	101.32	20	1.2	2980	44.1	162.7	Y315L₂-2	200	1220	3800		
MC180-1.5	180	101.32	20	1.2	2980	49.0	178.6	Y355M₁-2	220	1650	4300		
MC180-1.55	180	101.32	20	1.2	2980	53.9	194.1	Y355M-2	250	1760	4300		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC180-1.6	180	101.32	20	1.2	2980	58.8	209.8	Y355M-2	250	1760	4800	400	350
MC180-1.65	180	101.32	20	1.2	2980	63.7	224.6	Y355L ₁ -2	280	1830	5300		
MC180-1.7	180	101.32	20	1.2	2980	68.6	239.2	Y355L ₁ -2	280	1830	5300		
MC180-1.75	180	101.32	20	1.2	2980	73.5	254.1	Y355L ₂ -2	315	1900	5800		
MC180-1.8	180	101.32	20	1.2	2980	78.4	268.2	Y355L ₂ -2	315	1900	5800		
MC200-1.3	200	101.32	20	1.2	2980	29.4	124.5	Y315L ₁ -2	160	1160	2800		
MC200-1.35	200	101.32	20	1.2	2980	34.3	143.5	Y315L ₂ -2	185	1220	3300		
MC200-1.4	200	101.32	20	1.2	2980	39.2	162.1	Y315L ₂ -2	200	1220	3800		
MC200-1.45	200	101.32	20	1.2	2980	44.1	180.8	Y355M ₁ -2	220	1650	3800		
MC200-1.5	200	101.32	20	1.2	2980	49.0	198.4	Y355M ₂ -2	250	1760	4300		
MC200-1.55	200	101.32	20	1.2	2980	53.9	215.7	Y355L ₁ -2	280	1830	4300		
MC200-1.6	200	101.32	20	1.2	2980	58.8	230.6	Y355L ₁ -2	280	1830	4800		
MC200-1.65	200	101.32	20	1.2	2980	63.7	250	Y355L ₂ -2	315	1900	5300		
MC200-1.7	200	101.32	20	1.2	2980	68.6	265.4	Y355L ₂ -2	315	1900	5300		
MC200-1.75	200	101.32	20	1.2	2980	73.5	282.1	YKK400-2"	355	2580	5800		
MC200-1.8	200	101.32	20	1.2	2980	78.4	298.1	YKK400-2"	355	2580	5800		
MC220-1.3	220	101.32	20	1.2	2980	29.4	146.2	Y315L ₂ -2	185	1220	2800		
MC220-1.35	220	101.32	20	1.2	2980	34.3	160.5	Y315L ₂ -2	200	1220	2800		
MC220-1.4	220	101.32	20	1.2	2980	39.2	193.1	Y355M ₁ -2	220	1650	3800		
MC220-1.5	220	101.32	20	1.2	2980	49.0	235.5	Y355L ₁ -2	280	1830	4300		
MC220-1.6	220	101.32	20	1.2	2980	58.8	276.6	Y355L ₂ -2	315	1900	4800		
MC220-1.7	220	101.32	20	1.2	2980	68.6	316.0	YKK400-2"	400	2580	5300		
MC220-1.8	220	101.32	20	1.2	2980	78.4	354.2	YKK400-2"	450	2680	5800		
MC220-1.9	220	101.32	20	1.2	2980	88.2	391.1	YKK400-2"	450	2680	5800		
MC250-1.3	250	101.32	20	1.2	2980	29.4	166.9	Y315L ₂ -2	200	1220	2800		
MC250-1.35	250	101.32	20	1.2	2980	34.3	180.8	Y355M ₁ -2	220	1650	4300		
MC250-1.4	250	101.32	20	1.2	2980	39.2	213.2	Y355M ₂ -2	250	1760	3800		
MC250-1.5	250	101.32	20	1.2	2980	49.0	260.7	Y355L ₂ -2	315	1900	4300		
MC250-1.6	250	101.32	20	1.2	2980	58.8	305.6	YKK400-2"	355	2580	4800		
MC250-1.7	250	101.32	20	1.2	2980	68.6	354.5	YKK400-2"	400	2580	5300		
MC250-1.8	250	101.32	20	1.2	2980	78.4	390.7	YKK400-2"	450	2680	5800		
MC250-1.9	250	101.32	20	1.2	2980	88.2	431.2	YKK400-2"	500	2780	5800		
MC300-1.3	300	101.32	20	1.2	2980	29.4	194.6	Y355M ₂ -2	250	1760	4950	500	450
MC300-1.4	300	101.32	20	1.2	2980	39.2	255.6	Y355L ₂ -2	315	1900	6150		
MC300-1.5	300	101.32	20	1.2	2980	49.0	312.6	YKK400-2"	355	2580	7350		
MC300-1.6	300	101.32	20	1.2	2980	58.8	366.4	YKK400-2"	450	2680	7350		
MC300-1.7	300	101.32	20	1.2	2980	68.6	401.1	YKK400-2"	500	2780	8550		
MC300-1.8	300	101.32	20	1.2	2980	78.4	449.3	YKK450-2"	560	3880	9750		
MC300-1.9	300	101.32	20	1.2	2980	88.2	495.7	YKK450-2"	560	3880	9750		
MC350-1.3	350	101.32	20	1.2	2980	29.4	227.05	Y355L ₁ -2	280	1830	4950		
MC350-1.4	350	101.32	20	1.2	2980	39.2	286.3	YKK400-2"	355	2580	6150		
MC350-1.5	350	101.32	20	1.2	2980	49.0	348.2	YKK400-2"	400	2580	7350		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC350-1.6	350	101.32	20	1.2	2980	58.8	408.8	YKK400-2'	500	2780	7350	500	450
MC350-1.7	350	101.32	20	1.2	2980	68.6	466.9	YKK450-2'	560	3880	8550		
MC350-1.8	350	101.32	20	1.2	2980	78.4	522.7	YKK450-2'	630	3980	9750		
MC350-1.9	350	101.32	20	1.2	2980	88.2	572.6	YKK450-2'	710	4100	9750		
MC400-1.3	400	101.32	20	1.2	2980	29.4	258.1	Y355L₂-2	315	1900	4950		
MC400-1.4	400	101.32	20	1.2	2980	39.2	327.2	YKK400-2'	400	2580	6150		
MC400-1.5	400	101.32	20	1.2	2980	49.0	400	YKK400-2'	500	2780	7350		
MC400-1.6	400	101.32	20	1.2	2980	58.8	468.6	YKK450-2'	560	3880	7350		
MC400-1.7	400	101.32	20	1.2	2980	68.6	534.2	YKK450-2'	630	3980	8550		
MC400-1.8	400	101.32	20	1.2	2980	78.4	598.4	YKK450-2'	710	4100	9750		
MC400-1.9	400	101.32	20	1.2	2980	88.2	660.2	YKK450-2'	800	4250	9750		
MC450-1.3	450	101.32	20	1.2	2980	29.4	286.2	YKK400-2'	355	2580	4950		
MC450-1.4	450	101.32	20	1.2	2980	39.2	368.1	YKK400-2'	450	2680	6150		
MC450-1.5	450	101.32	20	1.2	2980	49.0	449.2	YKK450-2'	560	3880	7350		
MC450-1.6	450	101.32	20	1.2	2980	58.8	527.0	YKK450-2'	630	3980	7350		
MC450-1.7	450	101.32	20	1.2	2980	68.6	601.8	YKK450-2'	710	4100	8550		
MC450-1.8	450	101.32	20	1.2	2980	78.4	673.7	YKK450-2'	800	4250	9750		
MC450-1.9	450	101.32	20	1.2	2980	88.2	743.2	YKK500-2'	900	5200	9750		
MC500-1.3	500	101.32	20	1.2	2980	29.4	316.8	YKK400-2'	400	2580	6000	600	500
MC500-1.4	500	101.32	20	1.2	2980	39.2	408.1	YKK400-2'	500	2780	7200		
MC500-1.5	500	101.32	20	1.2	2980	49.0	498.3	YKK450-2'	630	3980	8400		
MC500-1.6	500	101.32	20	1.2	2980	58.8	584.7	YKK450-2'	710	4100	8400		
MC500-1.7	500	101.32	20	1.2	2980	68.6	667.7	YKK450-2'	800	4250	9600		
MC500-1.8	500	101.32	20	1.2	2980	78.4	747.6	YKK500-2'	900	5200	9600		
MC500-1.9	500	101.32	20	1.2	2980	88.2	824.7	YKK500-2'	1000	5440	10800		
MC500-2.0	500	101.32	20	1.2	2980	98.0	899.5	YKK500-2'	1120	5650	10800		
MC500-2.1	500	101.32	20	1.2	2980	107.8	934.7	YKK500-2'	1120	5650	10800		
MC550-1.3	550	101.32	20	1.2	2980	29.4	348.5	YKK400-2'	400	2580	6000		
MC550-1.4	550	101.32	20	1.2	2980	39.2	451.0	YKK450-2'	560	4000	6000		
MC550-1.5	550	101.32	20	1.2	2980	49.0	551.3	YKK450-2'	630	4300	7600		
MC550-1.6	550	101.32	20	1.2	2980	58.8	647.4	YKK450-2'	800	4900	9200		
MC550-1.7	550	101.32	20	1.2	2980	68.6	738.8	YKK500-2'	900	5200	9200		
MC550-1.8	550	101.32	20	1.2	2980	78.4	828.9	YKK500-2'	1000	5440	10800		
MC550-1.9	550	101.32	20	1.2	2980	88.2	915.1	YKK500-2'	1120	5650	10800		
MC550-2.0	550	101.32	20	1.2	2980	98.0	999.8	YKK500-2'	1250	5880	12400		
MC550-2.1	550	101.32	20	1.2	2980	107.8	1028.4	YKK500-2'	1250	5880	12400		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC600-1.3	600	101.32	20	1.2	2980	29.4	383.0	YKK400-2'	450	2680	6000	600	500
MC600-1.4	600	101.32	20	1.2	2980	39.2	492.7	YKK450-2'	630	4300	6000		
MC600-1.5	600	101.32	20	1.2	2980	49.0	601.5	YKK450-2'	710	4600	7600		
MC600-1.6	600	101.32	20	1.2	2980	58.8	705.2	YKK500-2'	900	5200	9200		
MC600-1.7	600	101.32	20	1.2	2980	68.6	807.4	YKK500-2'	1000	5440	9200		
MC600-1.8	600	101.32	20	1.2	2980	78.4	904.1	YKK500-2'	1120	5650	10800		
MC600-1.9	600	101.32	20	1.2	2980	88.2	997.4	YKK500-2'	1120	5650	10800		
MC600-2.0	600	101.32	20	1.2	2980	98.0	1041.2	YKK500-2'	1250	5880	12400		
MC600-2.1	600	101.32	20	1.2	2980	107.8	1122.5	YKK560-2'	1400	6800	12400		
MC650-1.3	650	101.32	20	1.2	2980	29.4	413.5	YKK400-2'	500	2780	6000		
MC650-1.4	650	101.32	20	1.2	2980	39.2	533.7	YKK450-2'	630	4300	6000		
MC650-1.5	650	101.32	20	1.2	2980	49.0	652.6	YKK450-2'	800	4900	7600		
MC650-1.6	650	101.32	20	1.2	2980	58.8	766.2	YKK500-2'	900	5200	9200		
MC650-1.7	650	101.32	20	1.2	2980	68.6	875.4	YKK500-2'	1000	5440	9200		
MC650-1.8	650	101.32	20	1.2	2980	78.4	981.3	YKK500-2'	1120	5650	10800		
MC650-1.9	650	101.32	20	1.2	2980	88.2	1082.2	YKK500-2'	1250	5880	10800		
MC650-2.0	650	101.32	20	1.2	2980	98.0	1130	YKK560-2'	1400	6800	12400		
MC650-2.1	650	101.32	20	1.2	2980	107.8	1218	YKK560-2'	1600	6900	12400		
MC700-1.3	700	101.32	20	1.2	2980	29.4	442.1	YKK450-2'	560	3880	6000		
MC700-1.4	700	101.32	20	1.2	2980	39.2	574.6	YKK450-2'	710	4600	6000		
MC700-1.5	700	101.32	20	1.2	2980	49.0	702.1	YKK450-2'	800	4900	7600		
MC700-1.6	700	101.32	20	1.2	2980	58.8	824.3	YKK500-2'	1000	5440	9200		
MC700-1.7	700	101.32	20	1.2	2980	68.6	942.1	YKK500-2'	1120	5650	9200		
MC700-1.8	700	101.32	20	1.2	2980	78.4	1054.4	YKK500-2'	1250	5880	10800		
MC700-1.9	700	101.32	20	1.2	2980	88.2	1164.9	YKK560-2'	1400	6800	10800		
MC700-2.0	700	101.32	20	1.2	2980	98.0	1217.0	YKK560-2'	1600	6900	12400		
MC700-2.1	700	101.32	20	1.2	2980	107.8	1311.0	YKK560-2'	1600	6900	12400		
MC750-1.3	750	101.32	20	1.2	2980	29.4	474.0	YKK450-2'	560	3880	6000		
MC750-1.4	750	101.32	20	1.2	2980	39.2	614.9	YKK450-2'	710	4600	6000		
MC750-1.5	750	101.32	20	1.2	2980	49.0	753.4	YKK500-2'	900	5200	7600		
MC750-1.6	750	101.32	20	1.2	2980	58.8	882.4	YKK500-2'	1120	5650	9200		
MC750-1.7	750	101.32	20	1.2	2980	68.6	1008.5	YKK500-2'	1250	5880	9200		
MC750-1.8	750	101.32	20	1.2	2980	78.4	1128.1	YKK560-2'	1400	6800	10800		
MC750-1.9	750	101.32	20	1.2	2980	88.2	1249.8	YKK560-2'	1600	6900	10800		
MC750-2.0	750	101.32	20	1.2	2980	98.0	1301.2	YKK560-2'	1600	6900	12400		
MC750-2.1	750	101.32	20	1.2	2980	107.8	1402.0	YKK560-2'	1800	7160	12400		
MC800-1.3	800	101.32	20	1.2	2980	29.4	508.3	YKK450-2'	630	3980	7200	800	700
MC800-1.4	800	101.32	20	1.2	2980	39.2	656.5	YKK450-2'	800	4900	7200		
MC800-1.5	800	101.32	20	1.2	2980	49.0	802.4	YKK500-2'	1000	5440	9000		
MC800-1.6	800	101.32	20	1.2	2980	58.8	942.3	YKK500-2'	1120	5650	9000		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC800-1.7	800	101.32	20	1.2	2980	68.6	1077.6	YKK500-2'	1250	5880	9000	800	700
MC800-1.8	800	101.32	20	1.2	2980	78.4	1205.4	YKK560-2'	1400	6800	10800		
MC800-1.9	800	101.32	20	1.2	2980	88.2	1297.5	YKK560-2'	1600	6900	10800		
MC800-2.0	800	101.32	20	1.2	2980	98.0	1392.0	YKK560-2'	1800	7160	10800		
MC800-2.1	800	101.32	20	1.2	2980	107.8	1498.7	YKK560-2'	1800	7160	12600		
MC800-2.2	800	101.32	20	1.2	2980	117.6	1602.6	YKK630-2'	2000	9450	12600		
MC800-2.3	800	101.32	20	1.2	2980	127.4	1703.2	YKK630-2'	2240	9850	12600		
MC800-2.4	800	101.32	20	1.2	2980	137.2	1800.8	YKK630-2'	2240	9850	12600		
MC850-1.3	850	101.32	20	1.2	2980	29.4	540.1	YKK450-2'	630	3980	7200		
MC850-1.4	850	101.32	20	1.2	2980	39.2	697.1	YKK450-2'	800	4900	7200		
MC850-1.5	850	101.32	20	1.2	2980	49.0	852.1	YKK500-2'	1000	5440	9000		
MC850-1.6	850	101.32	20	1.2	2980	58.8	1001.2	YKK500-2'	1250	5880	9000		
MC850-1.7	850	101.32	20	1.2	2980	68.6	1143.5	YKK560-2'	1400	6800	9000		
MC850-1.8	850	101.32	20	1.2	2980	78.4	1282.7	YKK560-2'	1600	6900	10800		
MC850-1.9	850	101.32	20	1.2	2980	88.2	1357.5	YKK560-2'	1800	7160	10800		
MC850-2.0	850	101.32	20	1.2	2980	98.0	1475.8	YKK560-2'	1800	7160	10800		
MC850-2.1	850	101.32	20	1.2	2980	107.8	1592.4	YKK630-2'	2000	9450	12600		
MC850-2.2	850	101.32	20	1.2	2980	117.6	1702.7	YKK630-2'	2000	9450	12600		
MC850-2.3	850	101.32	20	1.2	2980	127.4	1809.7	YKK630-2'	2240	9850	12600		
MC850-2.4	850	101.32	20	1.2	2980	137.2	1913.4	YKK630-2'	2240	9850	12600		
MC900-1.3	900	101.32	20	1.2	2980	29.4	572.5	YKK450-2'	710	4100	7200		
MC900-1.4	900	101.32	20	1.2	2980	39.2	738.1	YKK500-2'	900	5200	7200		
MC900-1.5	900	101.32	20	1.2	2980	49.0	903.2	YKK500-2'	1120	5650	9000		
MC900-1.6	900	101.32	20	1.2	2980	58.8	1060.1	YKK500-2'	1250	5880	9000		
MC900-1.7	900	101.32	20	1.2	2980	68.6	1211.9	YKK560-2'	1400	6800	9000		
MC900-1.8	900	101.32	20	1.2	2980	78.4	1357.8	YKK560-2'	1600	6900	10800		
MC900-1.9	900	101.32	20	1.2	2980	88.2	1435.7	YKK560-2'	1800	7160	10800		
MC900-2.0	900	101.32	20	1.2	2980	98.0	1562.1	YKK630-2'	2000	9450	10800		
MC900-2.1	900	101.32	20	1.2	2980	107.8	1686.1	YKK630-2'	2000	9450	12600		
MC900-2.2	900	101.32	20	1.2	2980	117.6	1802.9	YKK630-2'	2240	9850	12600		
MC900-2.3	900	101.32	20	1.2	2980	127.4	1916.1	YKK630-2'	2240	9850	12600		
MC900-2.4	900	101.32	20	1.2	2980	137.2	2025.9	YKK630-2'	2500	10250	12600		
MC950-1.3	950	101.32	20	1.2	2980	29.4	602.2	YKK450-2'	710	4100	7200		
MC950-1.4	950	101.32	20	1.2	2980	39.2	780.4	YKK500-2'	900	5200	7200		
MC950-1.5	950	101.32	20	1.2	2980	49.0	953.7	YKK500-2'	1120	5650	9000		
MC950-1.6	950	101.32	20	1.2	2980	58.8	1119.6	YKK560-2'	1400	6800	9000		
MC950-1.7	950	101.32	20	1.2	2980	68.6	1278.5	YKK560-2'	1600	6900	9000		
MC950-1.8	950	101.32	20	1.2	2980	78.4	1432.3	YKK560-2'	1800	7160	10800		
MC950-1.9	950	101.32	20	1.2	2980	88.2	1519.7	YKK560-2'	1800	7160	10800		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC950-2.0	950	101.32	20	1.2	2980	98.0	1652.0	YKK630-2'	2000	9450	10800	800	700
MC950-2.1	950	101.32	20	1.2	2980	107.8	1779.7	YKK630-2'	2240	9850	12600		
MC950-2.2	950	101.32	20	1.2	2980	117.6	1903.0	YKK630-2'	2240	9850	12600		
MC950-2.3	950	101.32	20	1.2	2980	127.4	2022.6	YKK630-2'	2500	10250	12600		
MC950-2.4	950	101.32	20	1.2	2980	137.2	2138.5	YKK630-2'	2500	10250	12600		
MC1000-1.3	1000	101.32	20	1.2	2980	29.4	633.8	YKK450-2'	710	4100	7200		
MC1000-1.4	1000	101.32	20	1.2	2980	39.2	821.7	YKK500-2'	1000	5440	7200		
MC1000-1.5	1000	101.32	20	1.2	2980	49.0	1002.7	YKK500-2'	1250	5880	9000		
MC1000-1.6	1000	101.32	20	1.2	2980	58.8	1177.5	YKK560-2'	1400	6800	9000		
MC1000-1.7	1000	101.32	20	1.2	2980	68.6	1345.5	YKK560-2'	1600	6900	9000		
MC1000-1.8	1000	101.32	20	1.2	2980	78.4	1507.2	YKK560-2'	1800	7160	10800		
MC1000-1.9	1000	101.32	20	1.2	2980	88.2	1599.7	YKK630-2'	2000	9450	10800		
MC1000-2.0	1000	101.32	20	1.2	2980	98	1623.6	YKK630-2'	2240	9850	10800		
MC1000-2.1	1000	101.32	20	1.2	2980	107.8	1795.5	YKK630-2'	2240	9850	12600		
MC1000-2.2	1000	101.32	20	1.2	2980	117.6	1920.4	YKK630-2'	2500	10250	12600		
MC1000-2.3	1000	101.32	20	1.2	2980	127.4	2096.5	YKK630-2'	2500	10250	12600		
MC1000-2.4	1000	101.32	20	1.2	2980	137.2	2217.2	YKK710-2'	2800	11000	12600		
MC1000-2.5	1000	101.32	20	1.2	2980	147	2399	YKK710-2'	3150	12900	12600		
MC1100-1.3	1100	101.32	20	1.2	2980	29.4	721.4	YKK500-2'	900	5200	7200		
MC1100-1.4	1100	101.32	20	1.2	2980	39.2	893.50	YKK500-2'	1250	5880	7200		
MC1100-1.5	1100	101.32	20	1.2	2980	49.0	1082.5	YKK560-2'	1400	6800	9000		
MC1100-1.6	1100	101.32	20	1.2	2980	58.8	1262.8	YKK560-2'	1600	6900	9000		
MC1100-1.7	1100	101.32	20	1.2	2980	68.6	1435.4	YKK560-2'	1800	7160	9000		
MC1100-1.8	1100	101.32	20	1.2	2980	78.4	1600.7	YKK630-2'	2000	9450	10800		
MC1100-1.9	1100	101.32	20	1.2	2980	88.2	1759.7	YKK630-2'	2240	9850	10800		
MC1100-2.0	1100	101.32	20	1.2	2980	98	1912.9	YKK630-2'	2500	10250	10800		
MC1100-2.1	1100	101.32	20	1.2	2980	107.8	2060.7	YKK630-2'	2500	10250	12600		
MC1100-2.2	1100	101.32	20	1.2	2980	117.6	2203.5	YKK710-2'	2800	11000	12600		
MC1100-2.3	1100	101.32	20	1.2	2980	127.4	2306.2	YKK710-2'	2800	11000	12600		
MC1100-2.4	1100	101.32	20	1.2	2980	137.2	2438.9	YKK710-2'	3150	12900	12600		
MC1100-2.5	1100	101.32	20	1.2	2980	147.0	2638.9	YKK710-2'	3150	12900	12600		
MC1200-1.3	1200	101.32	20	1.2	2980	29.4	798.4	YKK500-2'	1250	5880	7200		
MC1200-1.4	1200	101.32	20	1.2	2980	39.2	1027.1	YKK500-2'	1250	5880	7200		
MC1200-1.5	1200	101.32	20	1.2	2980	49.0	1209.8	YKK560-2'	1600	6900	9000		
MC1200-1.6	1200	101.32	20	1.2	2980	58.8	1411.6	YKK560-2'	1800	7160	9000		
MC1200-1.7	1200	101.32	20	1.2	2980	68.6	1604.8	YKK630-2'	2240	9850	9000		
MC1200-1.8	1200	101.32	20	1.2	2980	78.4	1765.3	YKK630-2'	2240	9850	10800		
MC1200-1.9	1200	101.32	20	1.2	2980	88.2	1919.7	YKK630-2'	2500	10250	10800		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC1200-2.0	1200	101.32	20	1.2	2980	98.0	2140.5	YKK710-2'	2800	11000	10800	800	700
MC1200-2.1	1200	101.32	20	1.2	2980	107.8	2248.1	YKK710-2'	2800	11000	12600		
MC1200-2.2	1200	101.32	20	1.2	2980	117.6	2403.9	YKK710-2'	3150	12900	12600		
MC1200-2.3	1200	101.32	20	1.2	2980	127.4	2554.8	YKK710-2'	3150	12900	12600		
MC1200-2.4	1200	101.32	20	1.2	2980	137.2	2773	YKK710-2'	3550	12900	12600		
MC1200-2.5	1200	101.32	20	1.2	2980	147.0	3004	YKK710-2'	4000	14400	12600		
MC1300-1.3	1300	101.32	20	1.2	2980	29.4	918.2	YKK500-2'	1250	5880	7200		
MC1300-1.4	1300	101.32	20	1.2	2980	39.2	1129.1	YKK560-2'	1600	6900	7200		
MC1300-1.5	1300	101.32	20	1.2	2980	49.0	1409.9	YKK630-2'	2000	9450	9000		
MC1300-1.6	1300	101.32	20	1.2	2980	58.8	1645.1	YKK630-2'	2000	9450	9000		
MC1300-1.7	1300	101.32	20	1.2	2980	68.6	1738.5	YKK630-2'	2000	9450	9000		
MC1300-1.8	1300	101.32	20	1.2	2980	78.4	1939	YKK630-2'	2500	10250	10800		
MC1300-1.9	1300	101.32	20	1.2	2980	88.2	2226.8	YKK710-2'	2800	11000	10800		
MC1300-2.0	1300	101.32	20	1.2	2980	98.0	2351.9	YKK710-2'	3150	12900	10800		
MC1300-2.1	1300	101.32	20	1.2	2980	107.8	2534.2	YKK710-2'	3150	12900	12600		
MC1300-2.2	1300	101.32	20	1.2	2980	117.6	2710.5	YKK710-2'	3550	13800	12600		
MC1300-2.3	1300	101.32	20	1.2	2980	127.4	2881.2	YKK710-2'	3550	13800	12600		
MC1300-2.4	1300	101.32	20	1.2	2980	137.2	3004	YKK710-2'	4000	14400	12600		
MC1300-2.5	1300	101.32	20	1.2	2980	147.0	3207.8	YKK710-2'	4000	14400	12600		
MC1400-1.3	1400	101.32	20	1.2	2980	29.4	1071.2	YKK560-2'	1400	6800	7200		
MC1400-1.4	1400	101.32	20	1.2	2980	39.2	1252.8	YKK630-2'	2000	9450	7200		
MC1400-1.5	1400	101.32	20	1.2	2980	49.0	1473.7	YKK630-2'	2000	9450	9000		
MC1400-1.6	1400	101.32	20	1.2	2980	58.8	1771.7	YKK630-2'	2240	9850	9000		
MC1400-1.7	1400	101.32	20	1.2	2980	68.6	1954.9	YKK630-2'	2500	10250	9000		
MC1400-1.8	1400	101.32	20	1.2	2980	78.4	2180.7	YKK710-2'	2800	11000	10800		
MC1400-1.9	1400	101.32	20	1.2	2980	88.2	2398.1	YKK710-2'	3150	12900	10800		
MC1400-2.0	1400	101.32	20	1.2	2980	98.0	2607.4	YKK710-2'	3150	12900	10800		
MC1400-2.1	1400	101.32	20	1.2	2980	107.8	2851.4	YKK710-2'	3550	13800	12600		
MC1400-2.2	1400	101.32	20	1.2	2980	117.6	3049.7	YKK710-2'	4000	14400	12600		
MC1400-2.3	1400	101.32	20	1.2	2980	127.4	3102.9	YKK710-2'	4000	14400	12600		
MC1400-2.4	1400	101.32	20	1.2	2980	137.2	3377.9	YKK710-2'	4000	14400	12600		
MC1400-2.5	1400	101.32	20	1.2	2980	147.0	3556.2	YKK710-2'	4500	14400	12600		
MC1500-1.3	1500	101.32	20	1.2	2980	29.4	1147.8	YKK560-2'	1400	6800	7200		
MC1500-1.4	1500	101.32	20	1.2	2980	39.2	1476.5	YKK560-2'	1800	7160	7200		
MC1500-1.5	1500	101.32	20	1.2	2980	49.0	1789.5	YKK630-2'	2500	10250	9000		
MC1500-1.6	1500	101.32	20	1.2	2980	58.8	1927.4	YKK630-2'	2500	10250	9000		
MC1500-1.7	1500	101.32	20	1.2	2980	68.6	2260.7	YKK710-2'	3150	12900	9000		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC1500-1.8	1500	101.32	20	1.2	2980	78.4	2521.9	YKK710-2'	3150	12900	10800	800	700
MC1500-1.9	1500	101.32	20	1.2	2980	88.2	2688	YKK710-2'	3550	13800	10800		
MC1500-2.0	1500	101.32	20	1.2	2980	98.0	3063	YKK710-2'	4000	14400	10800		
MC1500-2.1	1500	101.32	20	1.2	2980	107.8	3149.1	YKK710-2'	4500	14400	12600		
MC1500-2.2	1500	101.32	20	1.2	2980	117.6	3473.4	YKK710-2'	4500	14400	12600		
MC1500-2.3	1500	101.32	20	1.2	2980	127.4	3422.3	YKK710-2'	5000	14400	12600		
MC1500-2.4	1500	101.32	20	1.2	2980	137.2	3619.2	YKK710-2'	5000	14400	12600		
MC1500-2.5	1500	101.32	20	1.2	2980	147.0	3925.6	YKK710-2'	5500	14400	12600		

备注：1、当鼓风机使用条件与上表不符时，需进行性能换算，我公司可根据用户要求进行非标设计，以满足用户各种工况的具体需要。

2、当输送非空气介质时，我公司对壳体内部及叶轮进行相应的防腐处理，以满足客户需求。

3、注：带 “*” 号的电机为6kV/10kV高压电机，其余电压为380V。

Notice: 1、When the atmospheric conditions and medium are varied, the relative performance conversion calculation will be different. We can re-designed in accordance with the requirement of users to adapt to different working condition.

2、When transporting non air medium, our company carries on the corresponding antiseptic treatment to the inside of the shell and the impeller, so as to satisfy the customers demand

3、** are 6kV/10kV high-voltage motor, others are motors with voltage 380V.

MC 系列铸造多级离心鼓风机性能参数 (60Hz)

Performance Parameters of Series MC Casting Multistage Centrifugal Blower (60Hz)

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC20-1.3	20	101.32	20	1.2	3550	29.4	12.3	Y160L-2	18.5	150	590	150	150
MC20-1.35	20	101.32	20	1.2	3550	34.3	14.2	Y160L-2	18.5	150	700		
MC20-1.4	20	101.32	20	1.2	3550	39.2	16.3	Y180M-2	22	180	810		
MC20-1.45	20	101.32	20	1.2	3550	44.1	18.1	Y180M-2	22	180	810		
MC20-1.5	20	101.32	20	1.2	3550	49.0	20.0	Y200L ₁ -2	30	240	920		
MC20-1.55	20	101.32	20	1.2	3550	53.9	21.8	Y200L ₁ -2	30	240	920		
MC20-1.6	20	101.32	20	1.2	3550	58.8	23.6	Y200L ₁ -2	30	240	1030		
MC20-1.65	20	101.32	20	1.2	3550	63.7	25.3	Y200L ₂ -2	37	255	1030		
MC20-1.7	20	101.32	20	1.2	3550	68.6	29.1	Y225M-2	45	309	1140		
MC20-1.75	20	101.32	20	1.2	3550	73.5	31.9	Y225M-2	45	309	1250		
MC20-1.8	20	101.32	20	1.2	3550	78.4	34.2	Y225M-2	45	309	1360		
MC20-1.85	20	101.32	20	1.2	3550	83.3	35.9	Y225M-2	45	309	1360		
MC20-1.9	20	101.32	20	1.2	3550	88.2	38.2	Y250M-2	55	403	1360		
MC25-1.3	25	101.32	20	1.2	3550	29.4	16.8	Y180M-2	22	180	590		
MC25-1.35	25	101.32	20	1.2	3550	34.3	19.2	Y200L ₁ -2	30	240	700		
MC25-1.4	25	101.32	20	1.2	3550	39.2	20.9	Y200L ₁ -2	30	240	810		
MC25-1.45	25	101.32	20	1.2	3550	44.1	24.3	Y200L ₁ -2	30	240	810		
MC25-1.5	25	101.32	20	1.2	3550	49.0	26.7	Y200L ₁ -2	37	255	920		
MC25-1.55	25	101.32	20	1.2	3550	53.9	28.1	Y200L ₂ -2	37	255	920		
MC25-1.6	25	101.32	20	1.2	3550	58.8	29.6	Y200L ₂ -2	37	255	1030		
MC25-1.65	25	101.32	20	1.2	3550	63.7	34.9	Y225M-2	45	309	1030		
MC25-1.7	25	101.32	20	1.2	3550	68.6	38.9	Y250M-2	55	403	1140		
MC25-1.75	25	101.32	20	1.2	3550	73.5	39.3	Y250M-2	55	403	1250		
MC25-1.8	25	101.32	20	1.2	3550	78.4	43.4	Y250M-2	55	403	1360		
MC25-1.85	25	101.32	20	1.2	3550	83.3	44.5	Y250M-2	55	403	1360		
MC25-1.9	25	101.32	20	1.2	3550	88.2	47.7	Y280S-2	75	544	1360		
MC30-1.3	30	101.32	20	1.2	3550	29.4	19.7	Y200L ₁ -2	30	240	590		
MC30-1.35	30	101.32	20	1.2	3550	34.3	23.1	Y200L ₁ -2	30	240	700		
MC30-1.4	30	101.32	20	1.2	3550	39.2	26.1	Y200L ₁ -2	37	255	810		
MC30-1.45	30	101.32	20	1.2	3550	44.1	29.2	Y200L ₂ -2	37	255	810		
MC30-1.5	30	101.32	20	1.2	3550	49.0	32.2	Y225M-2	45	309	920		
MC30-1.55	30	101.32	20	1.2	3550	53.9	35.1	Y225M-2	45	309	920		
MC30-1.6	30	101.32	20	1.2	3550	58.8	40.1	Y250M-2	55	403	1030		
MC30-1.65	30	101.32	20	1.2	3550	63.7	43.9	Y250M-2	55	403	1030		
MC30-1.7	30	101.32	20	1.2	3550	68.6	46.7	Y250M-2	55	403	1140		
MC30-1.75	30	101.32	20	1.2	3550	73.5	49.4	Y280S-2	75	544	1250		
MC30-1.8	30	101.32	20	1.2	3550	78.4	52.1	Y280S-2	75	544	1360		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Temperature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC30-1.85	30	101.32	20	1.2	3550	83.3	53	Y280S-2	75	544	1360	150	150
MC30-1.9	30	101.32	20	1.2	3550	88.2	58.2	Y280S-2	75	544	1360		
MC35-1.3	35	101.32	20	1.2	3550	29.4	23.7	Y200L ₁ -2	30	240	590		
MC35-1.35	35	101.32	20	1.2	3550	34.3	27.1	Y200L ₂ -2	37	255	700		
MC35-1.4	35	101.32	20	1.2	3550	39.2	30.2	Y200L ₂ -2	37	255	810		
MC35-1.45	35	101.32	20	1.2	3550	44.1	33.5	Y200L ₂ -2	37	255	810		
MC35-1.5	35	101.32	20	1.2	3550	49.0	37.8	Y225M-2	45	309	920		
MC35-1.55	35	101.32	20	1.2	3550	53.9	41.1	Y250M-2	55	403	920		
MC35-1.6	35	101.32	20	1.2	3550	58.8	44.2	Y250M-2	55	403	1030		
MC35-1.65	35	101.32	20	1.2	3550	63.7	47.5	Y280S-2	75	544	1030		
MC35-1.7	35	101.32	20	1.2	3550	68.6	56.3	Y280S-2	75	544	1140		
MC35-1.75	35	101.32	20	1.2	3550	73.5	59.6	Y280S-2	75	544	1250		
MC35-1.8	35	101.32	20	1.2	3550	78.4	61.8	Y280S-2	75	544	1360		
MC35-1.85	35	101.32	20	1.2	3550	83.3	67.1	Y280M-2	90	620	1360		
MC35-1.9	35	101.32	20	1.2	3550	88.2	67.9	Y280M-2	90	620	1360		
MC40-1.3	40	101.32	20	1.2	3550	29.4	27.0	Y200L ₂ -2	37	255	1000	200	200
MC40-1.35	40	101.32	20	1.2	3550	34.3	29.2	Y200L ₂ -2	37	255	1180		
MC40-1.4	40	101.32	20	1.2	3550	39.2	35.2	Y225M-2	45	309	1180		
MC40-1.45	40	101.32	20	1.2	3550	44.1	39.3	Y225M-2	45	309	1360		
MC40-1.5	40	101.32	20	1.2	3550	49.0	42.1	Y250M-2	55	403	1360		
MC40-1.55	40	101.32	20	1.2	3550	53.9	47.2	Y280S-2	75	544	1540		
MC40-1.6	40	101.32	20	1.2	3550	58.8	49.9	Y280S-2	75	544	1540		
MC40-1.65	40	101.32	20	1.2	3550	63.7	55.8	Y280S-2	75	544	1720		
MC40-1.7	40	101.32	20	1.2	3550	68.6	58.4	Y280S-2	75	544	1720		
MC40-1.8	40	101.32	20	1.2	3550	78.4	64.2	Y280M-2	90	620	1900		
MC40-1.9	40	101.32	20	1.2	3550	88.2	71.7	Y280M-2	90	620	2080		
MC40-2.0	40	101.32	20	1.2	3550	98	76.8	Y315S-2	110	980	2080		
MC45-1.3	45	101.32	20	1.2	3550	29.4	30.2	Y200L ₂ -2	37	255	1000		
MC45-1.35	45	101.32	20	1.2	3550	34.3	35.1	Y225M-2	45	309	1180		
MC45-1.4	45	101.32	20	1.2	3550	39.2	39.5	Y250M-2	55	403	1180		
MC45-1.45	45	101.32	20	1.2	3550	44.1	44.2	Y250M-2	55	403	1360		
MC45-1.5	45	101.32	20	1.2	3550	49.0	48.6	Y250M-2	55	403	1360		
MC45-1.55	45	101.32	20	1.2	3550	53.9	52.6	Y280S-2	75	544	1540		
MC45-1.6	45	101.32	20	1.2	3550	58.8	57.1	Y280S-2	75	544	1540		
MC45-1.65	45	101.32	20	1.2	3550	63.7	60.8	Y280S-2	75	544	1720		
MC45-1.7	45	101.32	20	1.2	3550	68.6	64.8	Y280M-2	90	620	1720		
MC45-1.8	45	101.32	20	1.2	3550	78.4	73.3	Y280M-2	90	620	1900		
MC45-1.9	45	101.32	20	1.2	3550	88.2	83.2	Y315S-2	110	980	2080		
MC45-2.0	45	101.32	20	1.2	3550	98	86.3	Y315S-2	110	980	2080		
MC50-1.3	50	101.32	20	1.2	3550	29.4	33.8	Y225M-2	45	255	1000		
MC50-1.35	50	101.32	20	1.2	3550	34.3	38.9	Y225M-2	45	309	1180		
MC50-1.4	50	101.32	20	1.2	3550	39.2	44.2	Y250M-2	55	403	1180		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC50-1.45	50	101.32	20	1.2	3550	44.1	48.7	Y250M-2	55	403	1360	200	200
MC50-1.5	50	101.32	20	1.2	3550	49.0	54.5	Y280S-2	75	544	1360		
MC50-1.55	50	101.32	20	1.2	3550	53.9	59.7	Y280S-2	75	544	1540		
MC50-1.6	50	101.32	20	1.2	3550	58.8	65.3	Y280S-2	75	544	1540		
MC50-1.65	50	101.32	20	1.2	3550	63.7	68.7	Y280M-2	90	620	1720		
MC50-1.7	50	101.32	20	1.2	3550	68.6	73.9	Y280M-2	90	620	1720		
MC50-1.8	50	101.32	20	1.2	3550	78.4	82.7	Y315S-2	110	980	1900		
MC50-1.9	50	101.32	20	1.2	3550	88.2	91	Y315S-2	110	980	2080		
MC50-2.0	50	101.32	20	1.2	3550	98	95.9	Y315M ₁ -2	132	1080	2080		
MC55-1.3	55	101.32	20	1.2	3550	29.4	37.2	Y225M-2	45	309	1000		
MC55-1.35	55	101.32	20	1.2	3550	34.3	43.1	Y250M-2	55	403	1180		
MC55-1.4	55	101.32	20	1.2	3550	39.2	48.7	Y250M-2	55	403	1180		
MC55-1.45	55	101.32	20	1.2	3550	44.1	54.2	Y280S-2	75	544	1360		
MC55-1.5	55	101.32	20	1.2	3550	49.0	59.3	Y280S-2	75	544	1360		
MC55-1.55	55	101.32	20	1.2	3550	53.9	64.7	Y280S-2	75	544	1540		
MC55-1.6	55	101.32	20	1.2	3550	58.8	69.5	Y280M-2	90	620	1540		
MC55-1.65	55	101.32	20	1.2	3550	63.7	74.7	Y280M-2	90	620	1720		
MC55-1.7	55	101.32	20	1.2	3550	68.6	80.9	Y315S-2	110	980	1720		
MC55-1.75	55	101.32	20	1.2	3550	73.5	87.7	Y315S-2	110	980	1900		
MC55-1.8	55	101.32	20	1.2	3550	78.4	88.3	Y315S-2	110	980	1900		
MC55-1.9	55	101.32	20	1.2	3550	88.2	100.1	Y315M ₁ -2	132	1080	2080		
MC55-2.0	55	101.32	20	1.2	3550	98.0	112.3	Y315M ₁ -2	132	1080	2080		
MC60-1.3	60	101.32	20	1.2	3550	29.4	41.2	Y250M-2	55	403	1000		
MC60-1.35	60	101.32	20	1.2	3550	34.3	46.5	Y250M-2	55	403	1180		
MC60-1.4	60	101.32	20	1.2	3550	39.2	53.1	Y280S-2	75	544	1180		
MC60-1.45	60	101.32	20	1.2	3550	44.1	59.3	Y280S-2	75	544	1360		
MC60-1.5	60	101.32	20	1.2	3550	49.0	65.1	Y280M-2	90	620	1360		
MC60-1.55	60	101.32	20	1.2	3550	53.9	71.1	Y280M-2	90	620	1540		
MC60-1.6	60	101.32	20	1.2	3550	58.8	77.8	Y315S-2	110	980	1540		
MC60-1.65	60	101.32	20	1.2	3550	63.7	83.7	Y315S-2	110	980	1720		
MC60-1.7	60	101.32	20	1.2	3550	68.6	88.3	Y315S-2	110	980	1720		
MC60-1.75	60	101.32	20	1.2	3550	73.5	95.7	Y315M ₁ -2	132	1080	1900		
MC60-1.8	60	101.32	20	1.2	3550	78.4	102.5	Y315M ₁ -2	132	1080	1900		
MC60-1.9	60	101.32	20	1.2	3550	88.2	109.2	Y315M ₁ -2	132	1080	2080		
MC60-2.0	60	101.32	20	1.2	3550	98.0	120.6	Y315L ₁ -2	160	1160	2080		
MC65-1.3	65	101.32	20	1.2	3550	29.4	43.9	Y250M-2	55	403	1000		
MC65-1.35	65	101.32	20	1.2	3550	34.3	50.2	Y280S-2	75	544	1000		
MC65-1.4	65	101.32	20	1.2	3550	39.2	57.9	Y280S-2	75	544	1180		
MC65-1.45	65	101.32	20	1.2	3550	44.1	63.5	Y280S-2	75	544	1360		
MC65-1.5	65	101.32	20	1.2	3550	49.0	70.2	Y280M-2	90	620	1360		
MC65-1.55	65	101.32	20	1.2	3550	53.9	76.7	Y315S-2	110	980	1360		
MC65-1.6	65	101.32	20	1.2	3550	58.8	82.8	Y315S-2	110	980	1540		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC65-1.65	65	101.32	20	1.2	3550	63.7	89.2	Y315S-2	110	980	1540	200	200
MC65-1.7	65	101.32	20	1.2	3550	68.6	95.2	Y315M ₁ -2	132	1080	1720		
MC65-1.75	65	101.32	20	1.2	3550	73.5	102.7	Y315M ₁ -2	132	1080	1720		
MC65-1.8	65	101.32	20	1.2	3550	78.4	106.9	Y315M ₁ -2	132	1080	1900		
MC65-1.9	65	101.32	20	1.2	3550	88.2	116.1	Y315L ₁ -2	160	1160	2080		
MC65-2.0	65	101.32	20	1.2	3550	98.0	132.8	Y315L ₁ -2	160	1160	2080		
MC70-1.3	70	101.32	20	1.2	3550	29.4	47.4	Y250M-2	55	403	1000	250	250
MC70-1.35	70	101.32	20	1.2	3550	34.3	53.6	Y280S-2	75	544	1000		
MC70-1.4	70	101.32	20	1.2	3550	39.2	61.3	Y280S-2	75	544	1180		
MC70-1.45	70	101.32	20	1.2	3550	44.1	66.3	Y280M-2	90	620	1180		
MC70-1.5	70	101.32	20	1.2	3550	49.0	76.1	Y315S-2	110	980	1360		
MC70-1.55	70	101.32	20	1.2	3550	53.9	83.5	Y315S-2	110	980	1360		
MC70-1.6	70	101.32	20	1.2	3550	58.8	89.1	Y315S-2	110	980	1540		
MC70-1.65	70	101.32	20	1.2	3550	63.7	95.5	Y315M ₁ -2	132	1080	1540		
MC70-1.7	70	101.32	20	1.2	3550	68.6	101.8	Y315M ₁ -2	132	1080	1720		
MC70-1.75	70	101.32	20	1.2	3550	73.5	108.1	Y315M ₁ -2	132	1080	1720		
MC70-1.8	70	101.32	20	1.2	3550	78.4	114.2	Y315L ₁ -2	160	1160	1900		
MC70-1.9	70	101.32	20	1.2	3550	88.2	126.4	Y315L ₁ -2	160	1160	2080		
MC70-2.0	70	101.32	20	1.2	3550	98	145.3	Y315L ₂ -2	185	1220	2080		
MC75-1.3	75	101.32	20	1.2	3550	29.4	51.0	Y280S-2	75	544	1000		
MC75-1.35	75	101.32	20	1.2	3550	34.3	59.1	Y280S-2	75	544	1000		
MC75-1.4	75	101.32	20	1.2	3550	39.2	66.5	Y280M-2	90	620	1180		
MC75-1.45	75	101.32	20	1.2	3550	44.1	74.2	Y280M-2	90	620	1180		
MC75-1.5	75	101.32	20	1.2	3550	49.0	81.7	Y315S-2	110	980	1360		
MC75-1.55	75	101.32	20	1.2	3550	53.9	88.2	Y315S-2	110	980	1360		
MC75-1.6	75	101.32	20	1.2	3550	58.8	96.1	Y315M ₁ -2	132	1080	1540		
MC75-1.65	75	101.32	20	1.2	3550	63.7	102.2	Y315M ₁ -2	132	1080	1540		
MC75-1.7	75	101.32	20	1.2	3550	68.6	109.7	Y315M ₁ -2	132	1080	1720		
MC75-1.75	75	101.32	20	1.2	3550	73.5	115.9	Y315L ₁ -2	160	1160	1720		
MC75-1.8	75	101.32	20	1.2	3550	78.4	122.8	Y315L ₁ -2	160	1160	1900		
MC75-1.9	75	101.32	20	1.2	3550	88.2	135.7	Y315L ₂ -2	185	1220	2080		
MC75-2.0	75	101.32	20	1.2	3550	98	163.8	Y315L ₂ -2	200	1220	2080		
MC80-1.3	80	101.32	20	1.2	3550	29.4	54.5	Y280S-2	75	544	1570		
MC80-1.35	80	101.32	20	1.2	3550	34.3	62.9	Y280S-2	75	544	1570		
MC80-1.4	80	101.32	20	1.2	3550	39.2	71.8	Y280M-2	90	620	1870		
MC80-1.45	80	101.32	20	1.2	3550	44.1	78.7	Y315S-2	110	980	1870		
MC80-1.5	80	101.32	20	1.2	3550	49.0	86.7	Y315S-2	110	980	2170		
MC80-1.55	80	101.32	20	1.2	3550	53.9	85.4	Y315S-2	110	980	2170		
MC80-1.6	80	101.32	20	1.2	3550	58.8	94.2	Y315S-2	110	980	2470		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC80-1.65	80	101.32	20	1.2	3550	63.7	102.2	Y315M ₁ -2	132	1080	2470	250	250
MC80-1.7	80	101.32	20	1.2	3550	68.6	108.4	Y315M ₁ -2	132	1080	2770		
MC80-1.75	80	101.32	20	1.2	3550	73.5	123.5	Y315L ₁ -2	160	1160	2770		
MC80-1.8	80	101.32	20	1.2	3550	78.4	132.4	Y315L ₁ -2	160	1160	3070		
MC80-1.9	80	101.32	20	1.2	3550	88.2	142.0	Y315L ₂ -2	185	1220	3070		
MC80-2.0	80	101.32	20	1.2	3550	98.0	155.1	Y315L ₂ -2	200	1220	3070		
MC90-1.3	90	101.32	20	1.2	3550	29.4	60.8	Y280S-2	75	544	1570		
MC90-1.35	90	101.32	20	1.2	3550	34.3	70.1	Y280M-2	90	620	1870		
MC90-1.4	90	101.32	20	1.2	3550	39.2	80.1	Y315S-2	110	980	1870		
MC90-1.45	90	101.32	20	1.2	3550	44.1	90.9	Y315S-2	110	980	2170		
MC90-1.5	90	101.32	20	1.2	3550	49.0	98.1	Y315M ₁ -2	132	1080	2170		
MC90-1.55	90	101.32	20	1.2	3550	53.9	106.0	Y315M ₁ -2	132	1080	2170		
MC90-1.6	90	101.32	20	1.2	3550	58.8	114.3	Y315M ₁ -2	132	1080	2470		
MC90-1.65	90	101.32	20	1.2	3550	63.7	123.4	Y315L ₁ -2	160	1160	2470		
MC90-1.7	90	101.32	20	1.2	3550	68.6	130.4	Y315L ₁ -2	160	1160	2770		
MC90-1.75	90	101.32	20	1.2	3550	73.5	139.3	Y315L ₂ -2	185	1220	2770		
MC90-1.8	90	101.32	20	1.2	3550	78.4	147.0	Y315L ₂ -2	185	1220	3070		
MC90-1.9	90	101.32	20	1.2	3550	88.2	160.0	Y315L ₂ -2	200	1220	3070		
MC90-2.0	90	101.32	20	1.2	3550	98.0	174.5	Y355M ₁ -2	220	1650	3070		
MC100-1.3	100	101.32	20	1.2	3550	29.4	67.2	Y280M-2	90	620	1570	300	300
MC100-1.35	100	101.32	20	1.2	3550	34.3	72.3	Y280M-2	90	620	1570		
MC100-1.4	100	101.32	20	1.2	3550	39.2	87.2	Y315S-2	110	980	1870		
MC100-1.45	100	101.32	20	1.2	3550	44.1	95.9	Y315S-2	110	980	1870		
MC100-1.5	100	101.32	20	1.2	3550	49.0	107.4	Y315M ₁ -2	132	1080	2170		
MC100-1.55	100	101.32	20	1.2	3550	53.9	117.7	Y315L ₁ -2	160	1160	2170		
MC100-1.6	100	101.32	20	1.2	3550	58.8	127.8	Y315L ₁ -2	160	1160	2470		
MC100-1.65	100	101.32	20	1.2	3550	63.7	136.5	Y315L ₁ -2	160	1160	2470		
MC100-1.7	100	101.32	20	1.2	3550	68.6	145.9	Y315L ₂ -2	185	1220	2770		
MC100-1.75	100	101.32	20	1.2	3550	73.5	154.1	Y315L ₂ -2	200	1220	2770		
MC100-1.8	100	101.32	20	1.2	3550	78.4	163.0	Y315L ₂ -2	200	1220	3070		
MC100-1.9	100	101.32	20	1.2	3550	88.2	177.3	Y355M ₁ -2	220	1650	3070		
MC110-1.3	110	101.32	20	1.2	3550	29.4	72.5	Y280M-2	90	620	1570		
MC110-1.35	110	101.32	20	1.2	3550	34.3	83.5	Y280M-2	90	620	1570		
MC110-1.4	110	101.32	20	1.2	3550	39.2	95.1	Y315M ₁ -2	132	1080	1870		
MC110-1.45	110	101.32	20	1.2	3550	44.1	98.9	Y315M ₁ -2	132	1080	2170		
MC110-1.5	110	101.32	20	1.2	3550	49.0	117.3	Y315L ₁ -2	160	1160	2170		
MC110-1.55	110	101.32	20	1.2	3550	53.9	128.4	Y315L ₁ -2	160	1160	2170		
MC110-1.6	110	101.32	20	1.2	3550	58.8	138.3	Y315L ₂ -2	160	1160	2470		
MC110-1.65	110	101.32	20	1.2	3550	63.7	150.0	Y315L ₂ -2	185	1220	2470		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC110-1.7	110	101.32	20	1.2	3550	68.6	160.5	Y315L₂-2	200	1220	2770	300	300
MC110-1.75	110	101.32	20	1.2	3550	73.5	169.7	Y315L₂-2	200	1220	2770		
MC110-1.8	110	101.32	20	1.2	3550	78.4	179.6	Y355M₁-2	220	1650	3070		
MC110-1.9	110	101.32	20	1.2	3550	88.2	195.0	Y355M₂-2	250	1760	3070		
MC120-1.3	120	101.32	20	1.2	3550	29.4	78.1	Y280M-2	90	620	1570		
MC120-1.35	120	101.32	20	1.2	3550	34.3	86.8	Y315M₁-2	110	1080	1870		
MC120-1.4	120	101.32	20	1.2	3550	39.2	105.5	Y315M₁-2	132	1080	1870		
MC120-1.45	120	101.32	20	1.2	3550	44.1	112.9	Y315M₁-2	132	1080	1870		
MC120-1.5	120	101.32	20	1.2	3550	49.0	123.1	Y315L₁-2	160	1160	2170		
MC120-1.55	120	101.32	20	1.2	3550	53.9	134.0	Y315L₁-2	160	1160	2170		
MC120-1.6	120	101.32	20	1.2	3550	58.8	147.8	Y315L₂-2	185	1220	2470		
MC120-1.65	120	101.32	20	1.2	3550	63.7	160.3	Y315L₂-2	185	1220	2470		
MC120-1.7	120	101.32	20	1.2	3550	68.6	170.6	Y315L₂-2	200	1220	2770		
MC120-1.75	120	101.32	20	1.2	3550	73.5	180.7	Y355M₁-2	220	1650	2770		
MC120-1.8	120	101.32	20	1.2	3550	78.4	190.6	Y355M₁-2	220	1650	3070		
MC120-1.9	120	101.32	20	1.2	3550	88.2	207	Y355M₂-2	250	1760	3070		
MC130-1.3	130	101.32	20	1.2	3550	29.4	85.1	Y315S-2	110	980	1570		
MC130-1.35	130	101.32	20	1.2	3550	34.3	94.0	Y315M-2	132	1080	1570		
MC130-1.4	130	101.32	20	1.2	3550	39.2	105.6	Y315M-2	132	1080	1870		
MC130-1.45	130	101.32	20	1.2	3550	44.1	116.9	Y315M-2	132	1080	2170		
MC130-1.5	130	101.32	20	1.2	3550	49.0	127.9	Y315L₁-2	160	1160	2170		
MC130-1.55	130	101.32	20	1.2	3550	53.9	138.7	Y315L₂-2	185	1220	2470		
MC130-1.6	130	101.32	20	1.2	3550	58.8	158.2	Y315L₂-2	185	1220	2470		
MC130-1.65	130	101.32	20	1.2	3550	63.7	170.5	Y315L₂-2	200	1220	2770		
MC130-1.7	130	101.32	20	1.2	3550	68.6	180.6	Y355M1-2	220	1650	2770		
MC130-1.75	130	101.32	20	1.2	3550	73.5	191.0	Y355M1-2	250	1760	3070		
MC130-1.8	130	101.32	20	1.2	3550	78.4	202.0	Y355M-2	250	1760	3070		
MC130-1.9	130	101.32	20	1.2	3550	88.2	219.0	Y355M-2	280	1830	3070		
MC140-1.3	140	101.32	20	1.2	3550	29.4	87.3	Y315S1-2	110	980	3300		
MC140-1.35	140	101.32	20	1.2	3550	34.3	100.8	Y315M1-2	132	1080	3300		
MC140-1.4	140	101.32	20	1.2	3550	39.2	114.0	Y315L1-2	160	1160	3300		
MC140-1.45	140	101.32	20	1.2	3550	44.1	126.2	Y315L1-2	160	1160	3800		
MC140-1.5	140	101.32	20	1.2	3550	49.0	145.1	Y315L₂-2	185	1220	3800		
MC140-1.55	140	101.32	20	1.2	3550	53.9	151.2	Y315L₂-2	185	1220	4300		
MC140-1.6	140	101.32	20	1.2	3550	58.8	163.1	Y315L₂-2	200	1220	4300		
MC140-1.65	140	101.32	20	1.2	3550	63.7	174.8	Y355M1-2	220	1650	4300		
MC140-1.7	140	101.32	20	1.2	3550	68.6	186.1	Y355M2-2	220	1650	4800		
MC140-1.75	140	101.32	20	1.2	3550	73.5	197.3	Y355M-2	250	1760	4800		
MC140-1.8	140	101.32	20	1.2	3550	78.4	208.6	Y355M-2	250	1760	5300		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Temperature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC140-1.9	140	101.32	20	1.2	3550	88.2	237.0	Y355L1-2	280	1830	5300	300	300
MC140-2.0	140	101.32	20	1.2	3550	98.0	271.5	Y355L2-2	315	1900	5300		
MC150-1.3	150	101.32	20	1.2	3550	29.4	93.8	Y315S1-2	110	980	3300		
MC150-1.35	150	101.32	20	1.2	3550	34.3	108.1	Y315M1-2	132	1080	3300		
MC150-1.4	150	101.32	20	1.2	3550	39.2	121.8	Y315L1-2	160	1160	3300		
MC150-1.45	150	101.32	20	1.2	3550	44.1	135.8	Y315L1-2	160	1160	3800		
MC150-1.5	150	101.32	20	1.2	3550	49.0	142.1	Y315L2-2	185	1220	3800		
MC150-1.55	150	101.32	20	1.2	3550	53.9	162.1	Y315L2-2	200	1220	4300		
MC150-1.6	150	101.32	20	1.2	3550	58.8	174.8	Y355M-2	220	1650	4300		
MC150-1.65	150	101.32	20	1.2	3550	63.7	187.2	Y355M1-2	220	1650	4300		
MC150-1.7	150	101.32	20	1.2	3550	68.6	199.3	Y355M2-2	250	1760	4800		
MC150-1.75	150	101.32	20	1.2	3550	73.5	211.7	Y355L1-2	280	1830	4800		
MC150-1.8	150	101.32	20	1.2	3550	78.4	223.4	Y355L1-2	280	1830	5300		
MC150-1.9	150	101.32	20	1.2	3550	88.2	254.0	Y355L2-2	315	1900	5300		
MC150-2.0	150	101.32	20	1.2	3550	98.0	290.9	YKK400-2	355	2580	5300	400	350
MC160-1.3	160	101.32	20	1.2	3550	29.4	100.1	Y315M1-2	132	1080	3300		
MC160-1.35	160	101.32	20	1.2	3550	34.3	115.2	Y315L1-2	160	1160	3300		
MC160-1.4	160	101.32	20	1.2	3550	39.2	130.1	Y315L1-2	160	1160	3300		
MC160-1.45	160	101.32	20	1.2	3550	44.1	144.7	Y315L2-2	185	1220	3800		
MC160-1.5	160	101.32	20	1.2	3550	49.0	158.8	Y315L2-2	200	1220	3800		
MC160-1.55	160	101.32	20	1.2	3550	53.9	172.7	Y355M1-2	220	1650	4300		
MC160-1.6	160	101.32	20	1.2	3550	58.8	186.4	Y355M1-2	220	1650	4300		
MC160-1.65	160	101.32	20	1.2	3550	63.7	199.7	Y355M-2	250	1760	4300		
MC160-1.7	160	101.32	20	1.2	3550	68.6	212.9	Y355L1-2	280	1830	4800		
MC160-1.75	160	101.32	20	1.2	3550	73.5	225.8	Y355L1-2	280	1830	4800		
MC160-1.8	160	101.32	20	1.2	3550	78.4	238.2	Y355L2-2	315	1900	5300		
MC160-1.9	160	101.32	20	1.2	3550	88.2	271.0	Y355L2-2	315	1900	5300		
MC160-2.0	160	101.32	20	1.2	3550	98.0	312.2	YKK400-2	355	2580	5300		
MC180-1.3	180	101.32	20	1.2	3550	29.4	112.0	Y315L1-2	160	1160	3300		
MC180-1.35	180	101.32	20	1.2	3550	34.3	129.1	Y315L1-2	160	1160	3300		
MC180-1.4	180	101.32	20	1.2	3550	39.2	146.2	Y315L2-2	185	1220	3300		
MC180-1.45	180	101.32	20	1.2	3550	44.1	162.7	Y315L2-2	200	1220	3800		
MC180-1.5	180	101.32	20	1.2	3550	49.0	178.6	Y355M1-2	220	1650	3800		
MC180-1.55	180	101.32	20	1.2	3550	53.9	194.1	Y355M-2	250	1760	4300		
MC180-1.6	180	101.32	20	1.2	3550	58.8	209.8	Y355M-2	250	1760	4300		
MC180-1.65	180	101.32	20	1.2	3550	63.7	224.6	Y355L1-2	280	1830	4300		
MC180-1.7	180	101.32	20	1.2	3550	68.6	239.2	Y355L1-2	280	1830	4800		
MC180-1.75	180	101.32	20	1.2	3550	73.5	254.1	Y355L2-2	315	1900	4800		
MC180-1.8	180	101.32	20	1.2	3550	78.4	268.2	Y355L2-2	315	1900	5300		
MC180-1.9	180	101.32	20	1.2	3550	88.2	305.0	YKK400-2	355	2580	5300		
MC180-2.0	180	101.32	20	1.2	3550	98.0	333.0	YKK400-2	400	2580	5300		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC200-1.35	200	101.32	20	1.2	3550	34.3	143.5	Y315L ₂ -2	185	1220	3300	400	350
MC200-1.4	200	101.32	20	1.2	3550	39.2	162.1	Y315L ₂ -2	200	1220	3300		
MC200-1.45	200	101.32	20	1.2	3550	44.1	180.8	Y355M ₁ -2	220	1650	3800		
MC200-1.5	200	101.32	20	1.2	3550	49.0	198.4	Y355M ₂ -2	250	1760	3800		
MC200-1.55	200	101.32	20	1.2	3550	53.9	215.7	Y355L ₁ -2	280	1830	4300		
MC200-1.6	200	101.32	20	1.2	3550	58.8	230.6	Y355L ₁ -2	280	1830	4300		
MC200-1.6555	200	101.32	20	1.2	3550	63.7	250	Y355L ₂ -2	315	1900	4300		
MC200-1.7	200	101.32	20	1.2	3550	68.6	265.4	Y355L ₂ -2	315	1900	4800		
MC200-1.75	200	101.32	20	1.2	3550	73.5	282.1	YKK400-2'	355	2580	4800		
MC200-1.8	200	101.32	20	1.2	3550	78.4	298.0	YKK400-2'	355	2580	5300		
MC200-1.9	200	101.32	20	1.2	3550	88.2	338.0	YKK400-2'	400	2580	5300		
MC200-2.0	200	101.32	20	1.2	3550	98	370.0	YKK400-2'	450	2680	5300		
MC220-1.3	220	101.32	20	1.2	3550	29.4	146.9	Y315L ₂ -2	185	1220	3300		
MC220-1.4	220	101.32	20	1.2	3550	39.2	193.1	Y355M ₁ -2	220	1650	3300		
MC220-1.5	220	101.32	20	1.2	3550	49.0	235.5	Y355L ₁ -2	280	1830	3800		
MC220-1.6	220	101.32	20	1.2	3550	58.8	276.6	Y355L ₂ -2	315	1900	4300		
MC220-1.7	220	101.32	20	1.2	3550	68.6	316.0	YKK400-2'	400	2580	4800		
MC220-1.8	220	101.32	20	1.2	3550	78.4	354.2	YKK400-2'	450	2680	5300		
MC220-1.9	220	101.32	20	1.2	3550	88.2	391.1	YKK400-2'	450	2680	5300		
MC220-2.0	220	101.32	20	1.2	3550	98	426.6	YKK400-2'	500	2780	5300		
MC250-1.3	250	101.32	20	1.2	3550	29.4	166.9	Y315L ₂ -2	200	1220	3300		
MC250-1.4	250	101.32	20	1.2	3550	39.2	213.2	Y355M ₁ -2	250	1760	3300		
MC250-1.5	250	101.32	20	1.2	3550	49.0	260.7	Y355L ₂ -2	315	1900	3800		
MC250-1.6	250	101.32	20	1.2	3550	58.8	305.6	YKK400-2'	355	2580	4300		
MC250-1.7	250	101.32	20	1.2	3550	68.6	354.5	YKK400-2'	400	2580	4800		
MC250-1.8	250	101.32	20	1.2	3550	78.4	390.7	YKK400-2'	450	2680	5300		
MC250-1.9	250	101.32	20	1.2	3550	88.2	431.2	YKK400-2'	500	2780	5300		
MC250-2.0	250	101.32	20	1.2	3550	98.0	470.7	YKK450-2'	560	3880	5300		
MC300-1.3	300	101.32	20	1.2	3550	29.4	194.6	Y355M ₂ -2	250	1760	4950	500	450
MC300-1.4	300	101.32	20	1.2	3550	39.2	255.6	Y355L ₂ -2	315	1900	4950		
MC300-1.5	300	101.32	20	1.2	3550	49.0	312.6	YKK400-2'	355	2580	6150		
MC300-1.6	300	101.32	20	1.2	3550	58.8	366.4	YKK400-2'	450	2680	6150		
MC300-1.7	300	101.32	20	1.2	3550	68.6	401.1	YKK400-2'	500	2780	7350		
MC300-1.8	300	101.32	20	1.2	3550	78.4	449.3	YKK450-2'	560	3880	7350		
MC300-1.9	300	101.32	20	1.2	3550	88.2	495.7	YKK450-2'	560	3880	8550		
MC300-2.0	300	101.32	20	1.2	3550	98.0	540.7	YKK450-2'	630	3980	8550		
MC350-1.3	350	101.32	20	1.2	3550	29.4	227.05	Y355L ₁ -2	280	1830	4950		
MC350-1.4	350	101.32	20	1.2	3550	39.2	286.3	YKK400-2'	355	2580	4950		
MC350-1.5	350	101.32	20	1.2	3550	49.0	348.2	YKK400-2'	400	2580	6150		
MC350-1.6	350	101.32	20	1.2	3550	58.8	408.8	YKK400-2'	500	2780	6150		
MC350-1.7	350	101.32	20	1.2	3550	68.6	466.9	YKK450-2'	560	3880	7350		
MC350-1.8	350	101.32	20	1.2	3550	78.4	522.7	YKK450-2'	630	3980	7350		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC350-1.9	350	101.32	20	1.2	3550	88.2	572.6	YKK450-2'	710	4100	8550	500	450
MC350-2.0	350	101.32	20	1.2	3550	98.0	630.6	YKK450-2'	710	4100	8550		
MC400-1.3	400	101.32	20	1.2	3550	29.4	258.1	Y355L₂-2	315	1900	4950		
MC400-1.4	400	101.32	20	1.2	3550	39.2	327.2	YKK400-2'	400	2580	4950		
MC400-1.5	400	101.32	20	1.2	3550	49.0	400	YKK400-2'	500	2780	6150		
MC400-1.6	400	101.32	20	1.2	3550	58.8	468.6	YKK450-2'	560	3880	6150		
MC400-1.7	400	101.32	20	1.2	3550	68.6	534.2	YKK450-2'	630	3980	7350		
MC400-1.8	400	101.32	20	1.2	3550	78.4	598.4	YKK450-2'	710	4100	7350		
MC400-1.9	400	101.32	20	1.2	3550	88.2	660.2	YKK450-2'	800	4250	8550		
MC400-2.0	400	101.32	20	1.2	3550	98	720.6	YKK450-2'	800	4250	8550		
MC450-1.3	450	101.32	20	1.2	3550	29.4	286.2	YKK400-2'	355	2580	4950		
MC450-1.4	450	101.32	20	1.2	3550	39.2	368.1	YKK400-2'	450	2680	4950		
MC450-1.5	450	101.32	20	1.2	3550	49.0	449.2	YKK450-2'	560	3880	6150		
MC450-1.6	450	101.32	20	1.2	3550	58.8	527.0	YKK450-2'	630	3980	6150		
MC450-1.7	450	101.32	20	1.2	3550	68.6	601.8	YKK450-2'	710	4100	7350		
MC450-1.8	450	101.32	20	1.2	3550	78.4	673.7	YKK450-2'	800	4250	7350		
MC450-1.9	450	101.32	20	1.2	3550	88.2	743.0	YKK500-2'	900	5200	8550		
MC450-2.0	450	101.32	20	1.2	3550	98.0	810.5	YKK500-2'	1000	5440	8550		
MC500-1.3	500	101.32	20	1.2	3550	29.4	316.8	YKK400-2'	400	2580	4950		
MC500-1.4	500	101.32	20	1.2	3550	39.2	408.1	YKK400-2'	500	2780	4950		
MC500-1.5	500	101.32	20	1.2	3550	49.0	498.3	YKK450-2'	630	3980	6150		
MC500-1.6	500	101.32	20	1.2	3550	58.8	584.7	YKK450-2'	710	4100	6150		
MC500-1.7	500	101.32	20	1.2	3550	68.6	667.7	YKK450-2'	800	4250	7350		
MC500-1.8	500	101.32	20	1.2	3550	78.4	747.6	YKK500-2'	900	5200	7350		
MC500-1.9	500	101.32	20	1.2	3550	88.2	824.7	YKK500-2'	1000	5440	8550		
MC500-2.0	500	101.32	20	1.2	3550	98.0	899.5	YKK500-2'	1120	5650	8550		
MC550-1.3	550	101.32	20	1.2	3550	29.4	348.5	YKK400-2'	400	2580	6000		
MC550-1.4	550	101.32	20	1.2	3550	39.2	451.0	YKK450-2'	560	4000	6000		
MC550-1.5	550	101.32	20	1.2	3550	49.0	551.3	YKK450-2'	630	4300	6000		
MC550-1.6	550	101.32	20	1.2	3550	58.8	647.4	YKK450-2'	800	4900	7600		
MC550-1.7	550	101.32	20	1.2	3550	68.6	738.8	YKK500-2'	900	5200	7600		
MC550-1.8	550	101.32	20	1.2	3550	78.4	828.9	YKK500-2'	1000	5440	9200		
MC550-1.9	550	101.32	20	1.2	3550	88.2	915.1	YKK500-2'	1120	5650	9200		
MC550-2.0	550	101.32	20	1.2	3550	98.0	999.8	YKK500-2'	1250	5880	10800		
MC550-2.1	550	101.32	20	1.2	3550	107.8	1030	YKK560-2'	1400	6800	10800		
MC600-1.3	600	101.32	20	1.2	3550	29.4	383.0	YKK400-2'	450	2680	6000	600	500
MC600-1.4	600	101.32	20	1.2	3550	39.2	492.7	YKK450-2'	630	4300	6000		
MC600-1.5	600	101.32	20	1.2	3550	49.0	601.5	YKK450-2'	710	4600	6000		
MC600-1.6	600	101.32	20	1.2	3550	58.8	705.2	YKK500-2'	900	5200	7600		
MC600-1.7	600	101.32	20	1.2	3550	68.6	807.4	YKK500-2'	1000	5440	7600		
MC600-1.8	600	101.32	20	1.2	3550	78.4	904.1	YKK500-2'	1120	5650	7600		
MC600-1.9	600	101.32	20	1.2	3550	88.2	997.4	YKK500-2'	1120	5650	9200		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Tempe- rature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC600-2.0	600	101.32	20	1.2	3550	98	1041.2	YKK500-2'	1250	5880	9200	600	500
MC600-2.1	600	101.32	20	1.2	3550	107.8	1122.5	YKK560-2'	1400	6800	10800		
MC650-1.3	650	101.32	20	1.2	3550	29.4	413.5	YKK400-2'	500	2780	6000		
MC650-1.4	650	101.32	20	1.2	3550	39.2	533.7	YKK450-2'	630	4300	6000		
MC650-1.5	650	101.32	20	1.2	3550	49.0	652.6	YKK450-2'	800	4900	6000		
MC650-1.6	650	101.32	20	1.2	3550	58.8	766.2	YKK500-2'	900	5200	7600		
MC650-1.7	650	101.32	20	1.2	3550	68.6	875.4	YKK500-2'	1000	5440	7600		
MC650-1.8	650	101.32	20	1.2	3550	78.4	981.3	YKK500-2'	1120	5650	7600		
MC650-1.9	600	101.32	20	1.2	3550	88.2	1082.2	YKK500-2'	1250	5880	9200		
MC650-2.0	600	101.32	20	1.2	3550	98	1130	YKK560-2'	1400	6800	9200		
MC650-2.1	600	101.32	20	1.2	3550	107.8	1218	YKK560-2'	1400	6800	10800		
MC650-2.2	750	101.32	20	1.2	3550	117.6	1302	YKK560-2'	1800	7160	10800		
MC650-2.3	750	101.32	20	1.2	3550	127.4	1384	YKK630-2'	2000	9450	10800		
MC700-1.3	650	101.32	20	1.2	3550	29.4	442.1	YKK400-2'	500	2780	6000		
MC700-1.4	650	101.32	20	1.2	3550	39.2	574.6	YKK450-2*	710	4600	6000		
MC700-1.5	650	101.32	20	1.2	3550	49.0	702.1	YKK450-2*	800	4900	6000		
MC700-1.6	650	101.32	20	1.2	3550	58.8	824.3	YKK500-2*	1000	5440	7600		
MC700-1.7	700	101.32	20	1.2	3550	68.6	942.1	YKK500-2*	1120	5650	7600		
MC700-1.8	700	101.32	20	1.2	3550	78.4	1054.4	YKK500-2*	1250	5880	7600		
MC700-1.9	700	101.32	20	1.2	3550	88.2	1164.9	YKK560-2*	1400	6800	9200		
MC700-2.0	700	101.32	20	1.2	3550	98.0	1217.0	YKK560-2*	1600	6900	9200		
MC700-2.1	700	101.32	20	1.2	3550	107.8	1311.0	YKK560-2*	1600	6900	10800		
MC700-2.2	700	101.32	20	1.2	3550	117.6	1402	YKK560-2*	1600	6900	10800		
MC700-2.3	700	101.32	20	1.2	3550	127.4	1490	YKK560-2*	1800	7160	10800		
MC750-1.3	750	101.32	20	1.2	3550	29.4	474.0	YKK450-2'	560	3880	6000		
MC750-1.4	750	101.32	20	1.2	3550	39.2	614.9	YKK450-2'	710	4600	6000		
MC750-1.5	750	101.32	20	1.2	3550	49.0	753.4	YKK500-2'	900	5200	6000		
MC750-1.6	750	101.32	20	1.2	3550	58.8	882.4	YKK500-2'	1120	5650	7600		
MC750-1.7	750	101.32	20	1.2	3550	68.6	1008.5	YKK500-2'	1250	5880	7600		
MC750-1.8	750	101.32	20	1.2	3550	78.4	1128.1	YKK560-2'	1400	6800	7600		
MC750-1.9	750	101.32	20	1.2	3550	88.2	1249.8	YKK560-2'	1600	6900	9200		
MC750-2.0	750	101.32	20	1.2	3550	98	1301.2	YKK560-2'	1600	6900	9200		
MC750-2.1	750	101.32	20	1.2	3550	107.8	1402.0	YKK560-2'	1800	7160	10800		
MC750-2.2	750	101.32	20	1.2	3550	117.6	1502	YKK560-2'	1800	7160	10800		
MC750-2.3	750	101.32	20	1.2	3550	127.4	1597	YKK630-2'	2000	9450	10800		
MC800-1.3	800	101.32	20	1.2	3550	29.4	508.3	YKK450-2'	630	3980	6000		
MC800-1.4	800	101.32	20	1.2	3550	39.2	656.5	YKK450-2'	800	4900	6000		
MC800-1.5	800	101.32	20	1.2	3550	49.0	802.4	YKK500-2'	1000	5440	6000		
MC800-1.6	800	101.32	20	1.2	3550	58.8	942.3	YKK500-2'	1120	5650	7600		
MC800-1.7	800	101.32	20	1.2	3550	68.6	1077.6	YKK500-2'	1250	5880	7600		
MC800-1.8	800	101.32	20	1.2	3550	78.4	1205.4	YKK560-2'	1400	6800	7600		
MC800-1.9	800	101.32	20	1.2	3550	88.2	1297.5	YKK560-2'	1600	6900	9200		

风机 型号 Type of Blower	进气状态 Suction Condition				工作 转速 Speed rpm	升压 Discharge Pressure kPa	轴功率 Axial Power kW	电机 Motor			主机 重量 Blower Weight kg	进口法兰 Inlet Flange DN (PN1.0MPa)	出口法兰 Outlet Flange DN (PN1.0MPa)
	流量 Capacity m³/min	压力 Pressure kPa	温度 Temperature ℃	密度 Density kg/m³				型号 Type	功率 Power kW	重量 Weight kg			
MC800-2.0	800	101.32	20	1.2	3550	98	1392.0	YKK560-2'	1800	7160	9200	600	500
MC800-2.1	800	101.32	20	1.2	3550	107.8	1498.7	YKK560-2'	1800	7160	10800		
MC800-2.2	800	101.32	20	1.2	3550	117.6	1602.6	YKK630-2'	2000	9450	10800		
MC800-2.3	800	101.32	20	1.2	3550	127.4	1703.2	YKK630-2'	2240	9850	10800		
MC800-2.4	800	101.32	20	1.2	3550	137.2	1800.8	YKK630-2'	2240	9850	10800		
MC850-1.3	850	101.32	20	1.2	3550	29.4	540.1	YKK450-2'	630	3980	6000		
MC850-1.4	850	101.32	20	1.2	3550	39.2	697.1	YKK450-2'	800	4900	6000		
MC850-1.5	850	101.32	20	1.2	3550	49.0	852.1	YKK500-2'	1000	5440	6000		
MC850-1.6	850	101.32	20	1.2	3550	58.8	1001.2	YKK500-2'	1250	5880	7600		
MC850-1.7	850	101.32	20	1.2	3550	68.6	1143.5	YKK560-2'	1400	6800	7600		
MC850-1.8	850	101.32	20	1.2	3550	78.4	1282.7	YKK560-2'	1600	6900	7600		
MC850-1.9	850	101.32	20	1.2	3550	88.2	1357.5	YKK560-2'	1800	7160	9200		
MC850-2.0	850	101.32	20	1.2	3550	98.0	1475.8	YKK560-2'	1800	7160	9200		
MC850-2.1	850	101.32	20	1.2	3550	107.8	1592.4	YKK630-2'	2000	9450	9200		
MC850-2.2	850	101.32	20	1.2	3550	117.6	1702.7	YKK630-2'	2000	9450	10800		
MC850-2.3	850	101.32	20	1.2	3550	127.4	1809.7	YKK630-2'	2240	9850	10800		
MC850-2.4	850	101.32	20	1.2	3550	137.2	1913.4	YKK630-2'	2240	9850	10800		
MC900-1.3	900	101.32	20	1.2	3550	39.2	572.5	YKK450-2'	710	4100	6000		
MC900-1.4	900	101.32	20	1.2	3550	39.2	738.1	YKK500-2'	900	5200	6000		
MC900-1.5	900	101.32	20	1.2	3550	49.0	903.2	YKK500-2'	1120	5650	6000		
MC900-1.6	900	101.32	20	1.2	3550	58.8	1060.1	YKK500-2'	1250	5880	7600		
MC900-1.7	900	101.32	20	1.2	3550	68.6	1211.9	YKK560-2'	1400	6800	7600		
MC900-1.8	900	101.32	20	1.2	3550	78.4	1357.8	YKK560-2'	1600	6900	7600		
MC900-1.9	900	101.32	20	1.2	3550	88.2	1435.7	YKK560-2'	1800	7160	9200		
MC900-2.0	900	101.32	20	1.2	3550	98	1562.1	YKK630-2'	2000	9450	9200		
MC900-2.1	900	101.32	20	1.2	3550	107.8	1686.1	YKK630-2'	2000	9450	9200		
MC900-2.2	900	101.32	20	1.2	3550	117.6	1802.9	YKK630-2'	2240	9850	10800		
MC900-2.3	900	101.32	20	1.2	3550	127.4	1916.1	YKK630-2'	2240	9850	10800		
MC900-2.4	900	101.32	20	1.2	3550	137.2	2025.9	YKK630-2'	2500	10250	10800		

备注：1、当鼓风机使用条件与上表不符时，需进行性能换算，我公司可根据用户要求进行非标设计，以满足用户各种工况的具体需要。

2、当输送非空气介质时，我公司对壳体内部及叶轮进行相应的防腐处理，以满足客户需求。

3、注：带 “*” 号的电机为6kV/10kV高压电机，其余电压为380V。

Notice: 1、When the atmospheric conditions and medium are varied, the relative performance conversion calculation will be different. We can re-designed in accordance with the requirement of users to adapt to different working condition.

2、When transporting non air medium, our company carries on the corresponding antiseptic treatment to the inside of the shell and the impeller, so as to satisfy the customers demand

3、* are 6kV/10kV high-voltage motor, others are motors with voltage 380V.

Market Distribution

We have 42 offices throughout the country, in addition to Taiwan Province, 33 provinces in the country's administrative regions have a sound sales and service network. We can provide you with pre-sale, in-sale and after-sales service in a timely and convenient manner, understand your needs, and constantly improve the service and quality system while meeting the customized needs of customers.

High Performance Aerodynamic Design Methodology for Wide Service Conditions

By studying the influence of impeller and volute flow on efficiency and working stability, the R&D team proposed a flow control method and a pneumatic optimization design method to improve the performance of the main engine, which greatly improved the efficiency of the main engine.

Manufacturing & Equipment Base

has built laboratories, R&D buildings, processing workshops, etc., with internationally advanced and China leading high-precision processing equipment.





Yixing Aipu Air System Equipment Co., Ltd



13771572002



183426306@qq.com



aipukqdl.com

Yixing Yicheng Street Hardware Electromechanical City, Phase I, Block 5, District 3, 8071